# **Fundamentals of Passive Optical LAN**





# Brought to you by the Association for Passive Optical LAN (APOLAN)

### **Founding Members:**



www.apolanglobal.org



## **Course Agenda**

### Day 1

- Passive Optical LAN: 101
- Passive Optical LAN: 102
- Introduction to POL Components
- Introduction to POL Design with Hands-On

### Day 2

- Day 1 Review
- Power Survivability
- POL Testing Considerations
- POL Integration and Management
- POL Project Closeout Package Deliverables



### I am a...

- A. Consultant
- B. Designer
- C. Contractor
- D. Manufacturer
- E. End User
- F. Other



## My experience with POL is...

- A. I have installed one
- B. I have witnessed one
- C. I have a project now
- D. I have some knowledge
- E. I am here to learn



# **Passive Optical LAN:101**



Paul Cave

Technical Manager – Excel Networking



## **Section 1 Agenda**

- Introduction to Passive Optical LAN
- Where did it originate
- Market adoption
- Knowledge Check



# Let's Imagine...

Consumes twice the power!!

Promotes inefficient use of bandwidth!! costs 40 to 60% more!!

A Local Area Network that...

This describes a traditional LAN!



# An exciting new way...

## **Passive Optical LAN**

The infrastructure of tomorrow available today



"A Bandwidth Efficient LAN
Architecture Providing Measurable
CapEx & OpEx Savings"



## Thoughts...

### Henry Ford Wisdom...

"If I'd asked customers what they wanted, they would have said "a faster horse."

### Steve Jobs Wisdom...

"Man is the creator of change in this world. As such he should be above systems and structures, and not subordinate to them."



"There aren't many horse and buggies on the road and most of us don't have typewriters sitting on our desks. So why are copper networks still so widely used although they have been rendered obsolete by next-generation technologies?" Scott Forbes, CEO Forbes Media



## **Key Acronyms**

**GPON** 

PON vs. POL

**OLT and ONT** 



# What is Passive Optical LAN?

Revolutionary

**Economical** 

Efficient



## What is Passive Optical LAN?

Standards
based/recognized
technology

ITU G984, G987, G989

ANSI/TIA 568C


BICSI TDMM 13

Fiber Based Local Area Network

Point to Multipoint Topology




# Why Passive Optical LAN?

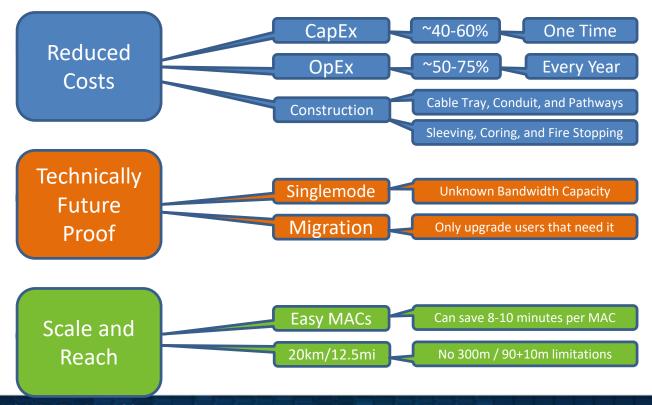




## Why Passive Optical LAN?

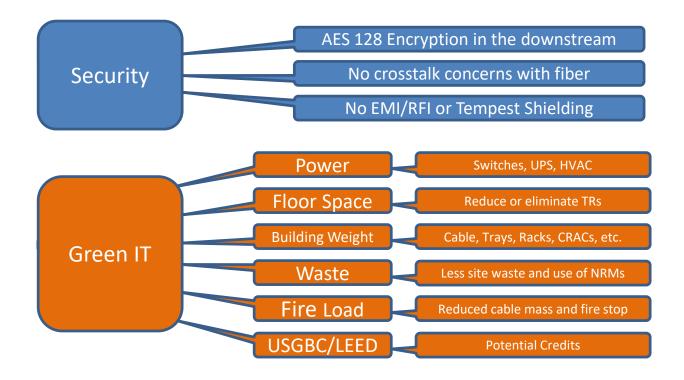



## Why Passive Optical LAN?

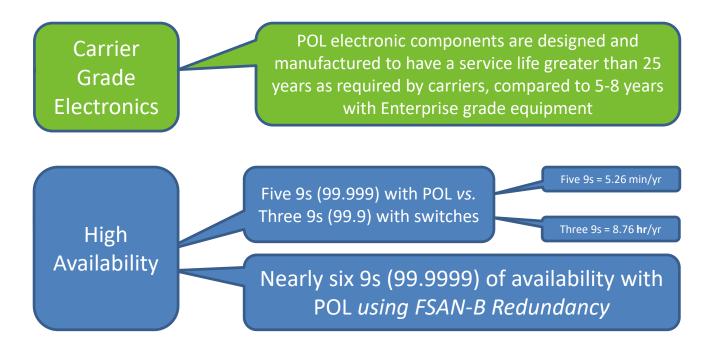



## What should you know?

### **Similar**

Standards Based

Local Area Network

**Enterprise Management** 

**Ethernet Frame Transport** 

NAC Auth. – VLANs – PoE 802.1x – 802.1Q – 802.3at

### **Different**

Point to Multipoint

**Multiple Services** 


**Guaranteed Bandwidth** 

Single Strand of SM Fiber

No Access and Distribution



### Where did it come from?

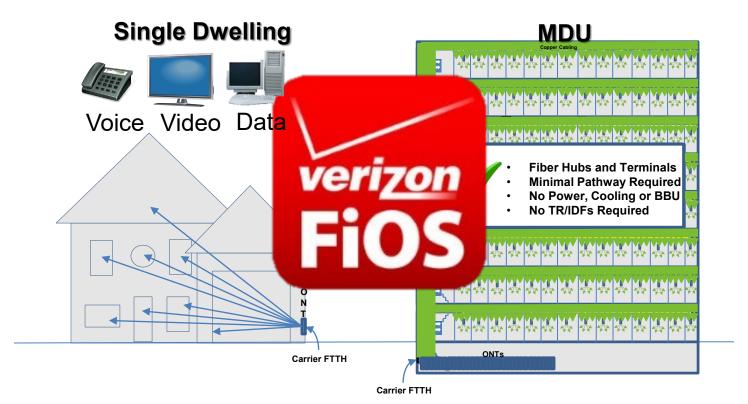



### What's the difference between a...

30 Story Apartment Building and a 30 Story Office Building





### Target POL users



Healthcare



Hospitality



Education (K-12 and Higher Ed.)



Campuses



High Occupancy Buildings
(Call Centers)



Multi-Tenant Units (Commercial and Residential)



Government and Military



**Sporting Venues** 



Casinos

### Market Segment Adoption (Partial List)

#### **Government and Military**

- Department of Energy
- Department of Defense
- Department Homeland Security
- Health & Human Services
- Intelligence Agencies
- NASA
- State Department
- US Air Force
- US Air Guard
- US Army
- US Army Reserves
- USDA Forest Service
- US Marine Corps
- US Forest Service

#### Hospitality/Hotels/Resorts

- Marriott
- Mandarin
- Crown Plaza
- Madinat Jumeirah Resort
- Taj Hotel JLT
- Kittitian Hill Resort

#### **Business Services**

- Canon
- Google International HQ Sunnyvale
- Getty Images London HQ
- Verizon Business Offices
- GlaxoSmithKline
- Shearman & Sterling
- NiSource
- Center for Excellence in Wireless & IT
- TGI Fridays
- Simmons Building for Physics & Geometry
- Motorola Solutions Sweden AB
- Deltek
- Miles & Stockbridge Law firm
- Telecommunications Industry Association

#### MTU/MDU Residential and Commercial

- Empire State Building
- Dallas Fort Worth Airport
- Trump Tower Miami
- Trump Plaza NY
- Stuyvesant Town/Peter Cooper Village NY

#### **Financial**

- Russell Investments (AU)
- SouthEast Bank

#### Healthcare/Hospitals

- Erickson Living Retirement
- Pardubice Regional Hospital
- ArchCare/Cardinal Cooke Center
- Williamsburg Landing
- Camp Pendleton Hospital
- Western State Hospital
- Guthrie Corning NY Hospital

#### Education/K-12/Universities/Colleges

- Virginia Tech
- Howard Community College
- Stony Brook State University
- University of Mary Washington
- Bridgepoint Education
- Dalhousie University
- Amherst College
- Chilliwack School District (BC)
- Washington State University
- American College of Radiology
- Orangeburg Public Schools
- San Diego Public Library
- Santa Fe Public Schools



### **Example POL Implementation**

### Global Fortune® 225 Company – Americas Headquarters Melville, NY USA

#### **Project Overview:**

- Approximately 1 million sq. ft. (main building and 2 parking garages)
  - Planned growth for another 200,000 sq. ft.
- 1,500 employees
  - Planned growth for another 750
- Nearly 12,000 GPON Ethernet ports

#### **Integrated Technologies over GPON:**

- VoIP (PCs tethered through phone)
- Security
  - Access Control
  - Biometrics
  - Cameras (main building and parking)
  - Virtual turnstiles
  - Blue Phones in parking garage
- 480 WAPs
- Building automation
- Environmental controls
- IP Video content distribution
- Digital signage
- Point of Sale







### San Diego Downtown Central Library

#### **Optical LAN**





- · Wireless Access Points
- Across library & courtyard
- · Free access for patrons



- Rack Mount ONT
- · 24-ports GbE Ethernet
- · Mainly serving WAPs




- · Chassis Style OLT
- Located 4<sup>th</sup> floor data room
- Serves all ONTs with 18 miles



- Surface Mount ONTs
- 4-ports GbE Ethernet
- Mainly mounted under desks



- · Single Mode Fiber
- Passive Optical Splitters
- · With Fiber Management

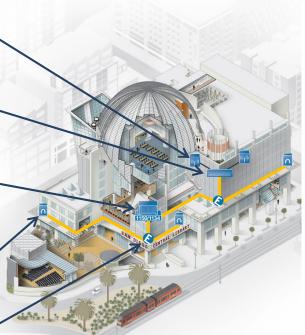

- · 9-story
- · 3-story domed reading room
- 350-seat auditorium
- · Technology center
- · Outdoor plaza and café
- Coffee Bar
- LAN services Voice over IP, data & on-line video access
- Wi-Fi throughout the library and courtyard via 36 Meraki WAPs
- · 3-D Printer Connectivity
- · Nearly three hundred digital devices available
  - Workstations
  - iPads
  - · iPad Minis
  - Chromebooks
  - Kindle
  - · Sony eReaders
- Technology enable collaborative workspaces
- · LEED Silver status

## Knowledge Check





Passive Optical LAN is a standards based/recognized technology



B.False



### Guaranteed bandwidth is possible with...

A.Passive Optical LAN

**B.Switch Based** 

C.Both A and B



### **POL supports 802.1Q VLANs**





AES 128 Encryption is present in \_\_\_\_\_\_ direction(s)

A.The upstream



C.Both upstream and downstream



## **Section 2 Agenda**

- Verticals
- Bandwidth Requirements
- Dynamic Bandwidth Allocation
- Knowledge Check



### **Education Vertical**

#### Schools

- Tight budgets vs. increased demand
- Space constraints and non-traditional TRs/IDFs
- Aging architecture vs. modern technology
  - Mondo Pads
  - Smart Boards
  - Central content

### Higher Education

- Higher bandwidth demand
- Increased BYOD
- Valuable space lost with traditional
- Lost revenue and added costs
  - Inefficient use of bandwidth
  - Inefficient use of space
  - Service providers profit



## **Hospitality Vertical**

#### Hotels

- Industry groups driving POL advanced technology
  - HTNG Hotel Technology Next Generation
  - HFTP Hospitality Financial & Technology Professionals
    - HITEC Hospitality Industry Technology Exposition and Conference
- Higher port density in guest rooms and non administrative areas
  - Digital signage
  - Cameras
  - WAPs
  - IP card readers and locks
  - Four to eight data ports per guest room
- Scalable solution with extended reach
  - Resort properties
  - Shared plot properties (Fairfield Inn, Courtyard, and Residence Inn)
- Future proof cabling infrastructure



### **Healthcare Vertical**

### Assisted Living

- Patient wandering WAP monitoring
  - In residence
  - Anywhere on the property
- VoIP and Data needs in residence and administration
- Security and Digital Communication

#### Critical Care

- Higher bandwidth demand
- Higher port counts in patient rooms, nurse stations, and operating rooms
- Building Automation and Intelligent Structures (converged networks)
  - Security
  - Monitoring
  - HVAC
  - Automated check-in / check out
  - Door sensors
- No EMI/RFI concerns or Tempest shielding needed with fiber
- Encrypted data pathways



### Large Enterprise / Financial Verticals

- Large Office Building
  - Movement toward all BYOD
  - Converged networks (HVAC, Automation, Security, etc.)
  - Pathway and space constraints
  - Cost of traditional switch, cabling, and maintenance refresh
  - Increased technology
    - Pervasive wireless
    - Digital signage
    - Everything headed IP

### Financial (Banks and Trading Floors)

- Higher bandwidth demand
- Increased security
- Increased port count
- Redundancy, diversity, and automatic failover (FSAN-B)
- Lost revenue and additional costs
  - Downtime (three 9s vs. five 9s)
  - Missed trades
  - Excess energy



### Call Centers, Cities, and Retail

#### Call Centers

- High density areas
- Low bandwidth requirements
  - IP Phones ~ 95Kb/s
  - Virtual "Dumb" terminals ~ 1Mb/s
  - Print/Scan/Fax ~ 500Kb/s

### Cities, Towns, Neighborhoods, and MDUs

- Connect multiple buildings without distance limitations
- Older buildings do not have pathways and spaces for traditional upgrades
- Scalable solution for future expansion

#### Retail

- Digital signage
- Customer Interactive Experience (pricing, web details, ordering, price compare)
- Security, POS, multi-tenant service




### You need how many "Gigs"?

Common LAN Services	Typical Required Bandwidth
Email and Web Browsing	500Kbps
Voice over IP	110Kbps
Cloud-based Services (data storage, enterprise s/w, collaboration, etc) Low	50Kbps
Cloud-based Services (data storage, enterprise s/w, collaboration, etc) High	100Kbps
Wireless Access Point Capacity (IEEE 802.11 a/b/g/n)	24Mbps
Wireless Access Point High Capacity (IEEE 802.11 ac/ad, dual radio)	300Mbps
IP Video Surveillance Standard Definition (MPEG4/H.264)	2Mbps
IP Video Surveillance High Definition (MPEG4/H.264)	6Mbps
IP Video Conferencing / Telepresence (720p-Good, includes primary/auxiliary)	2Mbps
IP Video Conferencing / Telepresence (1080p-Best, includes primary/auxiliary)	15Mbps

Gartner 2013 Estimates of Bandwidth needs through 2017 shows Super Users with a maximum requirement of sub-7Mbps



### How much bandwidth is *really* needed?

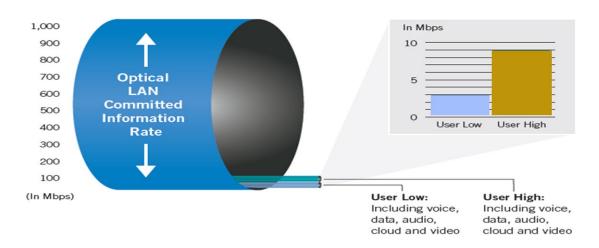


### Optical LAN bandwidth compared to Peak bandwidth per User in 2017

- Blue represents symmetrical 1 gigabit bandwidth available at every ONT port
- Light Blue and Green represents Gartner Low User and High User bandwidth required 2017



## **Bandwidth Capacity vs. Bandwidth Traffic**

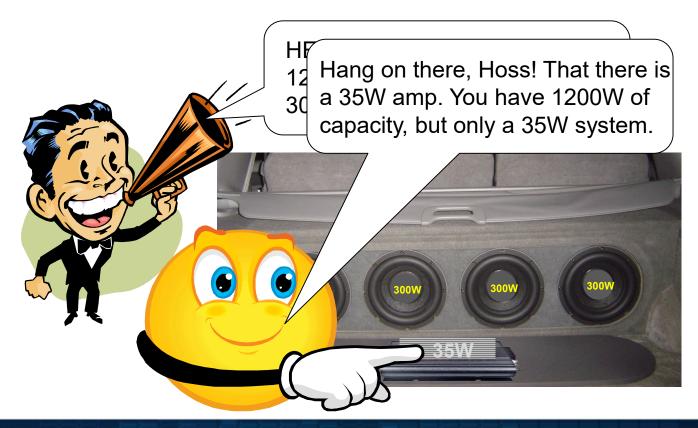

# In traditional networks...



Listen up!!! I have body 14 Fiber in my
Backbone and Gig C oper in my
Horizontal, so en let in Big switch it won't
have any resisted and I we get a Gig to the
desk and be future roof

Backbone OM3/4 (10Gb/s)




Horizontal CAT6A Cu (10Gb/s)





# It is not a matter of resistance...

48 Port Gigabit Ethernet Switch

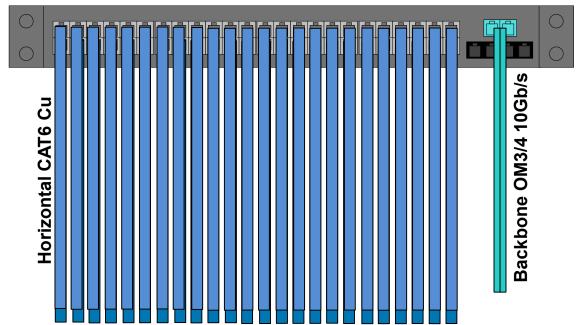







### Switch Data vs. Dynamic Bandwidth Allocation

#### 24 Port 10/100 Ethernet Switch



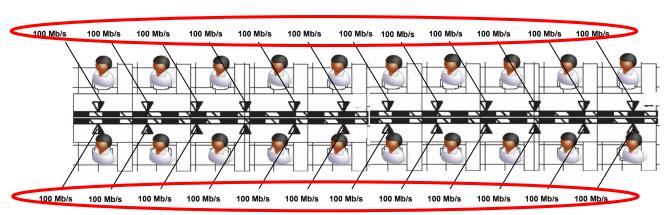


When he workday a white which was a supplied the workday and supplied the workday and when when we want a white a supplied the work and when we want a supplied the work and when a supplied the work and we want a supplied the work a

- A māxi**ra lina xim libb not** b/4991/19/9




### Switch Data vs. Dynamic Bandwidth Allocation

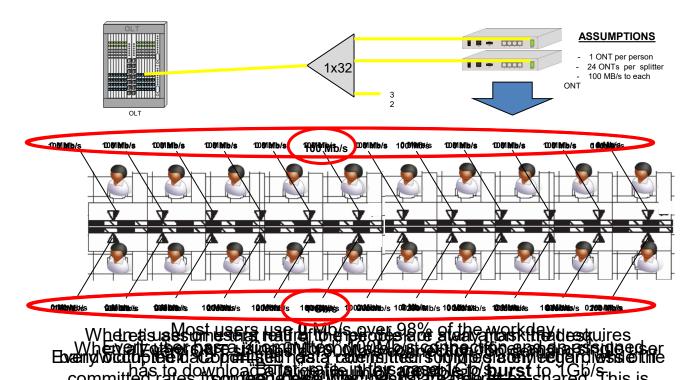

A maximum of 1 Gh



## **VLANS** and Committed /Burst Rates

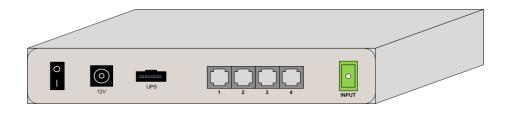





# Knowledge Check





# Gigabit switches provide 1Gb/s connections to each WAO

A.True





## Most users consume bandwidth all day long

A. True

✓ B. False



## This technology uses Dynamic Bandwidth Allocation

A. Switch Based





## Most users require a sustained GbE connection

A. True





# Questions?

Passive Optical LAN: 101



## 15 Minute Break



Please respect others and return on time.



# **Passive Optical LAN:102**







# **Section 3 Agenda**

- Layout
- Primary Components
- Design Tips
- Support and Compatibility
- Knowledge Check
- 10 Minute Break




# **Traditional LAN vs. POL (GPON)**

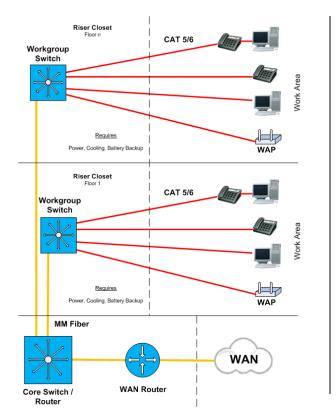

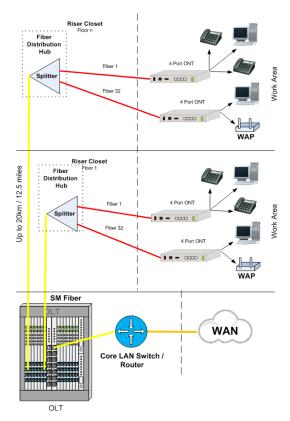




# On a Campus

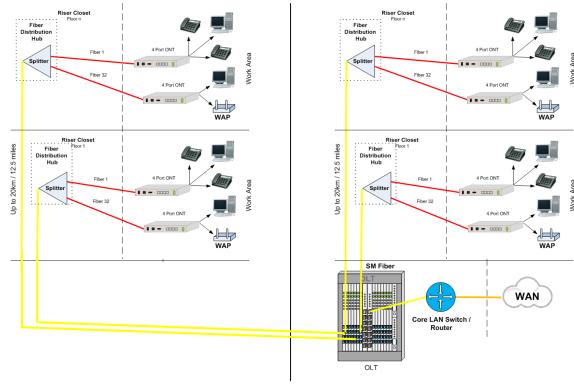




**Optical LAN** 

## **Basic POL Schematic**

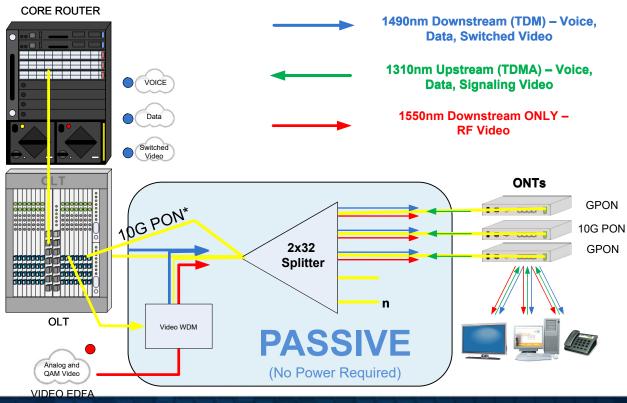


# The Migration to 10G PON (NG-PON1)

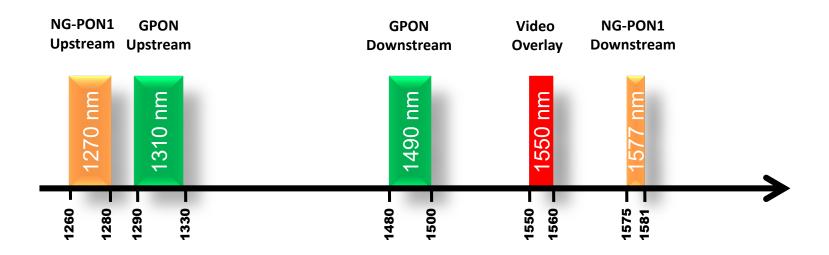

The cabling infrastructure stays the same and only the users that need it are upgraded.



# The Migration to 40G PON (NG-PON2)

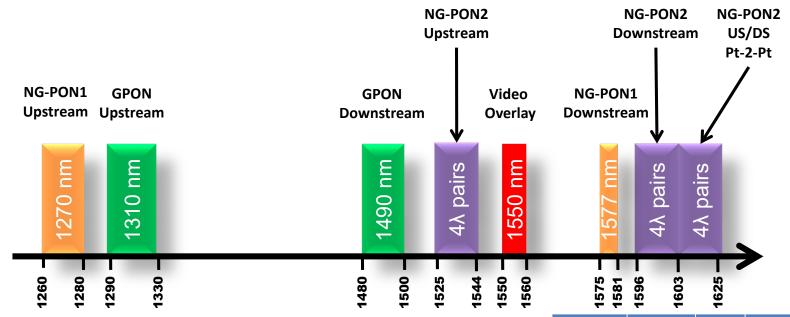

The cabling infrastructure stays the same and only the users that need it are upgraded.


PON Name	Version	DOWN (Gbps)	UP (Gbps)	Industry Standard
G-PON		2.5	1.25	ITU G.984
NG-PON1	XG-PON	10	2.5	ITU G.987
	XGS-PON	10	10	ITU G.9807
NG-PON2		40	40	ITU G.989


2019 BICSI Middle East & Africa District Conference & Exhibition

# **The Primary Components**

#### **Optical Line Terminal (OLT)**

- -48VDC Carrier Grade Chassis
- After Layer 3
- Up to 14 Line cards
- Typically 4 singlemode output ports per card
  - = 56 Outputs per chassis
  - = 1792 ONTs (1x32 splitters)
  - = 7168 Ethernet Ports (ONT has 4 copper output ports)



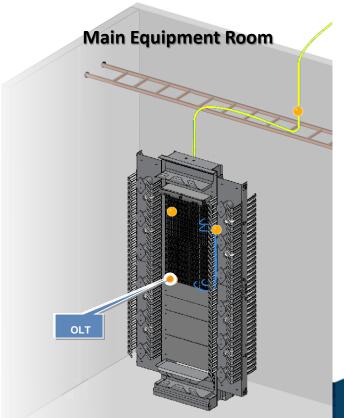



# **The Primary Components**

#### **Optical Splitters**





#### **Available Splits**


1x2

1x4 2x4

1x8 2x8

1x16 2x16

1x32 2x32










# **The Primary Components**

## ONT - Optical Network Terminal


- Active equipment provided by electronics manufacturers.
- Located near the user or device
- Typically 4 RJ45 (10/100/1000) outputs with optional POE
- Up to 60W of available POE (vendor specific)
- Standard HVAC is adequate
- Optional internal or external battery back-up
- POTS and COAX ports available
- Establishes and maintains secure AES 128 Encryption
- Supports multiple VLANs on each port



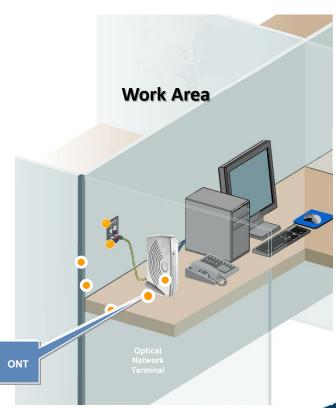




# **ONT Sharing**

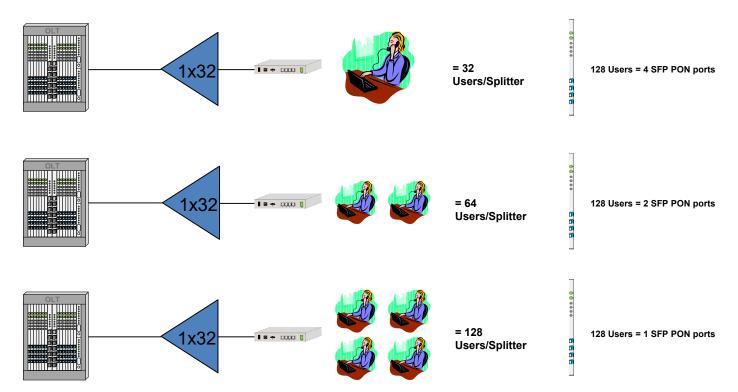


## **Distance and Loss**

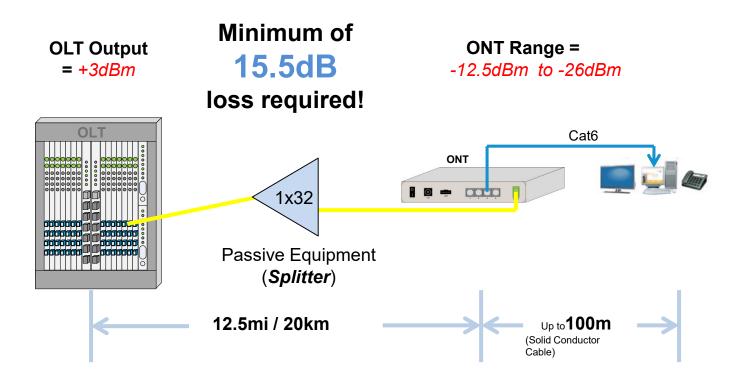




# **Cascade Splitting Loss**

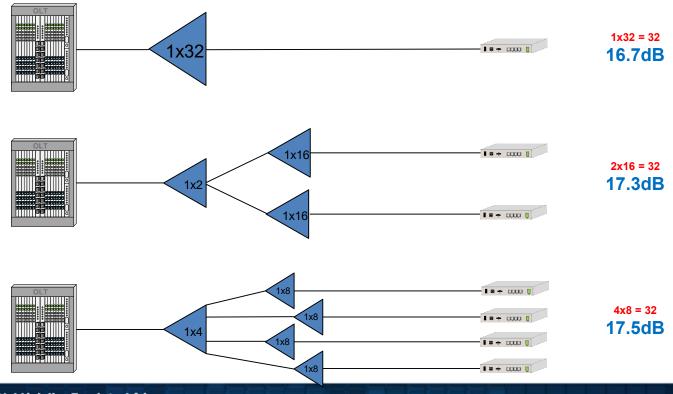




## Split Ratios Do NOT "Change" Bandwidth

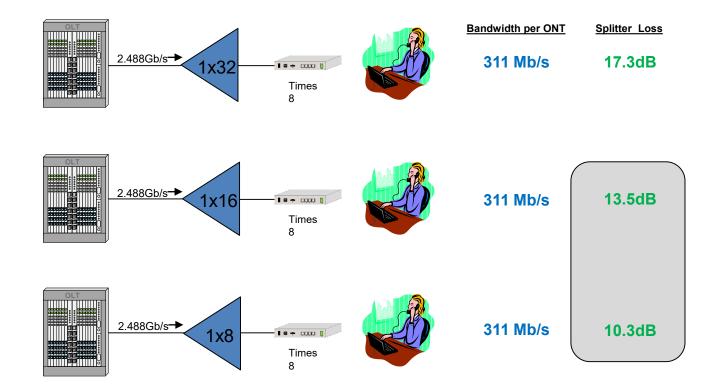




# Type B (FSAN-B) Redundancy

If any interruption is detected on the primary path (OLT to ONT), the OLT will switch to the redundant path instantaneously.

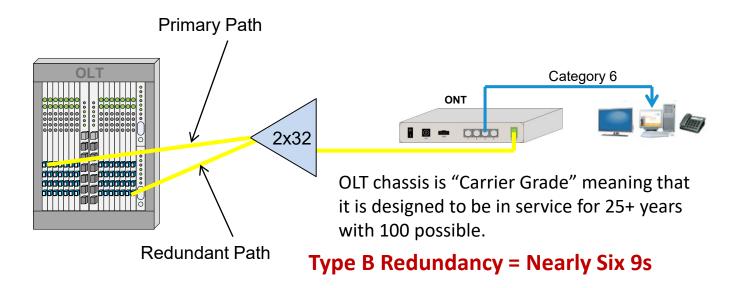



#### **Example Layout of Type B (FSAN-B) Redundancy**

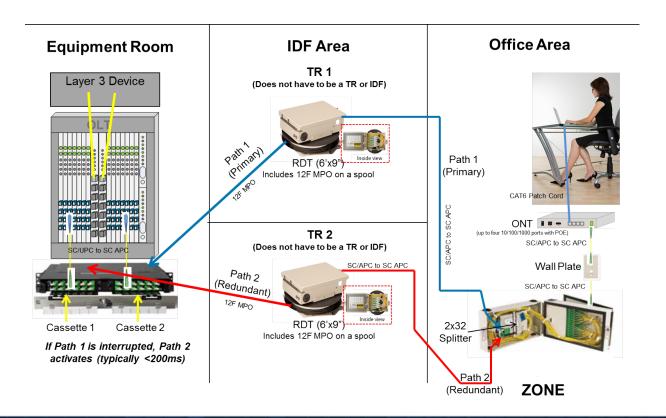

#### **IP/Ethernet Protocol Support**

Network Integration		
Multiple 1G and 10G Ethernet Uplinks		
IEEE 802.3ad Link Aggregation Control Protocol (LACP)		
IEEE 802.1Q VLAN Encapsulation		
IEEE 802.1w Rapid Spanning Tree (RSTP)		
IEEE 802.1s Multiple Spanning Tree (MSTP)		
Virtual Router-to-Router Redundancy (VRRP)		
IPv4 / IPv6		
IGMPv2 / IGMPv3		
Network Access Control (NAC)		
IEEE 802.1x (Port-based Authentication)		
Dynamic Host Control Protocol (DHCP)		
DHCP Snooping and Option 82 insertion		
Port Security, Sticky MACs		
RFC-2267 (Denial of Service)		
Traffic Storm Control		
Bridge Protocol Data Unit (BPDU) Guard		

Service Delivery
802.1p: Class of Service
IP differentiated services code point (DSCP)
Quality of Service: Per-VLAN, Per-Port, Per-Service queuing / scheduling *
Sophisticated QoS and Traffic Management
Eight Queues per VLAN
Policing, Scheduling, Shaping per Queue
Congestion and Flow Control
Hardware Based ACLs: L2, L3, L4
Hardware Based Multicast Management
IEEE 802.3af, 802.3at (PoE)
Link Layer Discovery Protocol (LLDP)

Monitoring / Management
SNMP v1, v2, v3
CLI Console Port
Remote Monitoring (RMON) software agent
RMON I & II
Enhanced SNMP MIB support
RFC 1213-MIB (MIB II)
Extended MIB support
Network Timing Protocol (NTP)
RADIUS based authentication
SSH v1, v2
VMWare Support for EMS
OLT SysLog support (2014)
Y.1371 (2014)
802.1ag Fault Detection (2014)

This represents a partial list of supported IEEE and IP/Ethernet protocols



# Knowledge Check





# Upstream (ONT to OLT) analog video utilizes which wavelength?

A.1550nm

B.1490nm

C.1310nm

D.1625nm

E. None



## A cascaded 1x4 + 1x16 split is a good practice?

A.True

✓ B.False



# **GPON** bandwidth can be increased by using a lower split ratio

A.True

✓ B.False



# The minimum loss required between the OLT and ONT is...

A.13.5dB

B.10.7dB



D.17.2dB

E. None of these



#### PoE in a POL is administered at the...

A.OLT



C.Injector

D.PoE is not possible



#### 10 Minute Break



Please respect others and return on time.




## **Section 4 Agenda**

- Savings
- LEED and Environmental Benefits
- Largest POL deployment in the world
- Knowledge Check
- Lunch



#### Savings

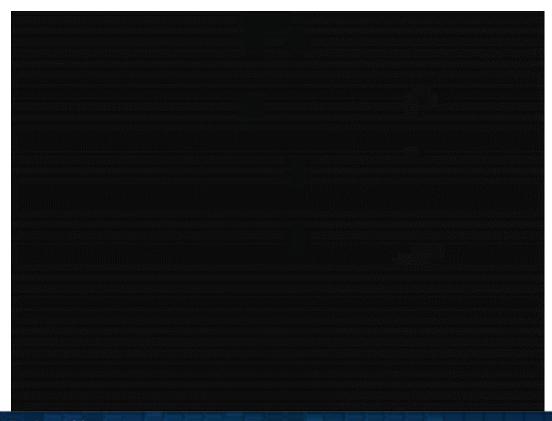



#### **POL: Total Cost of Ownership Savings**

Expense	250 Users	500 Users	1000 Users	Campus 5000 Users	Campus 10,000 Users
тсо	32%	46%	57%	68%	68%
СарЕх	31%	41%	48%	55%	55%
OpEx	40%	50%	65%	70%	70%
• Power	48%	61%	68%	75%	75%
• Cooling	48%	61%	68%	75%	75%



#### **POL: Power Consumption Comparison**

## Regional Medical Center 4000 drops

Price per kw hour	\$0.082	W/HR	Annual \$
Total POL Budget		14,050	\$10,081
Total Traditional Budget		37,171	\$26,670
Difference		(23,121)	(\$16,589)
Total Savings Percentage		-62.20%	

Traditional LAN					
Main Distribution Fra	me				
Description	Quantity	Rated Power	Total Power	Notes	
Cisco WS-C3750X-48P-S(715W)	7	134	937		
UPS	1	937	187	UPS overhead	
HVAC	1	1,125	1,350	Draw to cool UPS & Cisco *1.2	
Total			2,474		
Intermediate Distribution	Frames				
Description	Quantity	Rated Power	Total Power	Notes	
Cisco WS-C3750X-48P-S(715W)	96	134	12,854		
UPS	1	12,854	2,571	UPS overhead	
HVAC	1	15,425	18,510	Draw to cool UPS & Cisco *1.2	
Total			33,936		
Desktop/Work Are	a				
Description	Quantity	Rated Power	Total Power	Notes	
N/A					
Total			0		
Power over Ethernet					
Description		Attenuation	Total Power	Notes	
Copper drops	1,463				
Average length of drop	200				
Total feet Total	292,600	0.0026		Total loss via PoE	
			761		

		Passive Optica	al LAN	
Main Distributio	n Frame			
Description	Quantity	Rated Power	Total Power	Notes
AXS1800	2	516	1,032	2-SW, 2-SYS, 8-PON
UPS	1	1,032	206	UPS overhead
HVAC	1	1,238	1,486	Draw to cool UPS & AXS *1.2
Total			2,724	
Intermediate Distribu	ution Frames			
Description	Quantity	Rated Power	Total Power	Notes
N/A	N/A	N/A	N/A	
Total			0	
Desktop/Worl	( Area			
Description	Quantity	Rated Power	Total Power	Notes
WT21004	1,255	9	11,295	Admin areas
Total			11,295	
Power over Et	hernet			
Description	Quantity	Attenuation	Total Power	Notes
Copper drops	1,463			
Average length of drop	8			
		0.0000	20	Total loss via PoE
Total feet Total	11,704	0.0026	30	



#### Potential\* LEED Credits

- Energy and Atmosphere Credit 1 (1-3 pts).
  - Reduction in TRs, HVAC equipment, switch equipment, UPS, lighting and other energy needs.
  - The PON system helps the overall efficiency of the energy systems.
- Innovation in Design Credit 1 (1-4 pts).
  - The PON system utilizes less equipment, resulting in less raw materials, less garbage, less transportation and reduced time for implementation and commissioning.
  - In addition, utilizing a fiber system ensures the life of the system extends beyond the life of a conventional "switched" system.



#### "Eco-Friendly"

#### Reduced Power Requirements

Savings between 40% to 60%

#### Reduced HVAC Requirement

 A Fortune 500 company saved about \$450K on the Power distribution network (HVAC, backup etc) for a building project with 2000 Ethernet ports

#### Reduction in Non-renewable materials

 Reduction of up to 8000 pounds of plastic and copper versus a Cat 6 install for building of 4000 Ethernet ports

#### Floor Space Savings

Traditional layer-2 solutions are bound by the 300ft Ethernet limitation

#### Fire Load Savings

- Savings in Sprinkler Systems
- · Fire Load and ceiling space savings



#### **Green Benefits**

Reduction in power consumption
Reduction in non-renewable materials
Ceiling space and fire load savings
Reduction in cabling costs
Floor space savings

## **Cabling Comparison**

Riser Rated Cables	Reduced Bend Radius Single-Mode	Category 5e UTP	Category 6a UTP
10G Distance	40km	45m	100m
Cable OD	3mm	5.7mm	7.5mm
Weight	4lb / 1000'	22lb / 1000'	39lb / 1000'
Minimum Bend Radius	5mm	22.8mm	30mm
Tensile Strength	48lbf	25lbf	25lbf
Cost	Low	Medium	High



#### **Largest Enterprise POL Deployment**





## Knowledge Check





#### Which of these are a benefit of POL?

- A. Reduction in power
- B. Reduction of fire load
- C. Reduction of nonrenewable materials
- D. All of these are benefits



#### **LEED Credits are**



✓ A. Possible with POL

B. Automatic with POL

C. Guaranteed with POL

D. Not Possible with POL



## So far, my knowledge depth of Passive Optical LAN increased so far today by...

- A. A little
- B. A lot
- C. What is Passive Optical LAN?
- D. None



## Questions?



#### 60 Minute Lunch Break



Please respect others and return on time.



# Introduction to POL Components





## Agenda

- Components
  - OLT
  - ONT
  - Video
  - DC Power
- Power Considerations
- Management
  - Centralized Management
  - Management Systems
  - Bandwidth Management
  - VLANs, QoS, LLDP and other Standards



## **Objectives**

- Identify the various types of optical splitters and their principles of operation
- Identify the active electronic components in a Passive Optical LAN
- Understand the management principles for a POL



### **Components - OLT**

- OLT is head-end component
- Typically located in MDF or Data Center
- Manages connected ONTs
- Typically consist of:
  - Management
  - Switch Fabric
  - Uplink Interfaces
  - PON Interfaces
- Out-of-band Management



## **Components – Large OLT Models**

- Chassis-Based
- Fully Redundant
- Up to 224 PON Ports
- Thousands of ONTs
- DC Powered









## **Components – Small OLT Models**

#### **Small OLTs**

- AC and DC Power
- Small Chassis and Standalone
- Small Office/Field Office
- 4 to 16 PON Ports
- Hundreds of ONTs





## **Components – OLT Uplinks**

- Standard Ethernet uplinks to core
- Uplinks typically 1G or 10G pluggable optics
- VLANs trunked into uplink ports
- Uplinks can be combined into LAGs



#### **Components – OLT PON Ports**

- From 4 to 224 PON ports per OLT
- Each PON port typically supports 32 ONTs
  - = Thousands of ONTs per OLT!
- Typically SFP based
- Class C+ optics feature 32dB loss budget



## **Components – OLT Redundancy**

#### **Typically Redundant**

- Power
- Backplane
- Management
- Switch fabric
- Uplinks

#### Sometimes Redundant

- PON Ports
- PON Cards
- Entire OLT



## **Optical Splitters**

- Splitters provide optical connections in pairs
- Each 1x2 split equates to ½ of the optical power
  - ~3dB loss

- Splitters range from 1x2 up to 1x64 splitters
- 1x32 is the most common split ratio for POL



## **Splitter Loss**

Splitter	Max Loss*	Typical Loss*	Wavelength Range
1x2	3.8dB	3.1dB	1260-1360nm and 1480 -1580nm**
2x2	4.3dB	3.2dB	1260 - 1635nm
1x4	7.2dB	6.6dB	1260 - 1635nm
2x4	7.8dB	6.7dB	1260 - 1635nm
1x8	10.3dB	9.7dB	1260 - 1635nm
2x8	10.9dB	9.8dB	1260 - 1635nm
1x16	13.5dB	12.8dB	1260 - 1635nm
2x16	14.1dB	12.9dB	1260 - 1635nm
1x32	16.7dB	16.0dB	1260 - 1635nm
2x32	17.4dB	16.2dB	1260 - 1635nm
1x64	20.4dB	19.7dB	1260 - 1635nm
1x2 + 1x16	17.3dB	15.9dB	1260 - 1635nm
1x4 + 1x8	17.5dB	16.3dB	1260 - 1635nm



**Optical Splitter** 

The term "passive" in Passive Optical Network refers to the fact that the splitter requires no power as opposed to an "active" device like the OLT or switches an a traditional network. The splitter serves to optically replicate upstream signals to a number of downstream fibers. The typical number of fibers served in a PON network is 32. As the splitter provides a replicated optical signal to all 32 subscribers downstream, it is simultaneously combining those 32 fibers into a single feeder fiber in the upstream direction. Consequently the optical splitter is sometimes referred to as a splitter/combiner. The splitter will be housed in a number of form factors.






## **PLC Splitter**

#### Planar Lightwave Circuit (PLC) Splitter

- More Expensive
- Uniform Output
- Most appropriate for outdoor use
- Manufacturing
  - 1. Waveguide used to split the optical signal is fabricated using a silicon dioxide chip.
  - 2. Involves a lithographic process similar to that used in the manufacture of silicon computer chips. PLC splitters provide the most uniformity between fiber outputs (the downstream fibers) with respect to the amount of optical loss measured on each fiber.
- Best choice when loss is critical



## Planar Light Circuit/Planar Waveguide

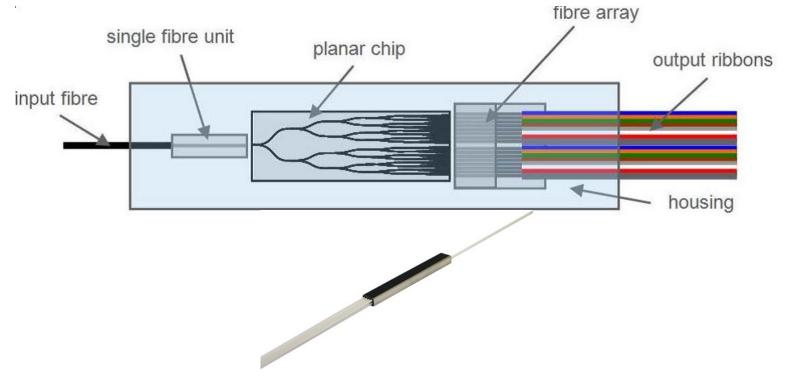




### **FBT Splitter**

#### Fused Biconical Taper (FBT) splitter

- Lower Cost
- Typically less uniform from fiber to fiber.
- Manufacturing
  - 1. Thermally fused two overlapping fibers together under tension
  - 2. The resulting fusion splice creates a two by two splitter.
  - 3. Typically, one of these fiber connections is trimmed off and the result is a single fiber subtending to two fibers.
  - 4. These two fiber outputs can then be fused to additional one-by-two splitters until the desired number of splits is achieved.
- Used where extreme temperature variations or other environmental factors are not likely to cause the optics connected at the ends of the fiber to drift from their optimum wavelength specifications.



#### **PLANAR vs FBT**

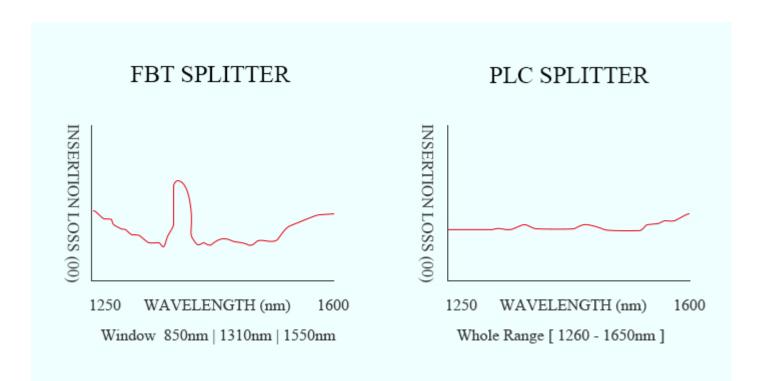



## **2xN Splitters**

- 2 Inputs
- 2 to 64 Outputs
- Second Input Allows
  - Redundant feeders/PON Ports/PON Cards/OLTs
  - Easier Migration to 10G
  - Flexibility for the Future



#### **ONTs**

- ONT located close to the end user
- Fiber input
- Variety of user interfaces available
- Provide PoE
- Consume ~7W power + PoE draw



#### **ONT Models - Traditional**

- Large variety of ONTs available
- AC and DC power options
- Desk-mount, In-wall, and Rack-mount
- Battery backup

- Match interfaces to user needs:
  - Ethernet Ports with PoE
  - POTS Ports
  - Coaxial Television
  - Wi-Fi











## **ONT Models - Unique**

In-Wall



Industrial/Outdoor









#### **ONT Connections**

#### What Can I Connect?

- PCs
- Thin Clients
- VoIP Phones
- POTS Phones
- Wireless Access Points
- Coaxial Cable TV
- IPTV

- Access Control
- Security Cameras
- Building Management Systems
- Biometric Sensors

 Anything with an Ethernet, POTS, or Coax Interface!



### **ONT Compatibility**

- EPON and GPON are not compatible
- Different manufactures *typically* choose not interoperate
- Beyond the standards, some manufacturers implement additional features – especially true in EPON



### **ONT Security**

- ONT security designed to assume the ONT is in the hands of the adversary
- ONT does not function without OLT
- Usually no management ports on ONT
- ONT receives all programming from OLT




### **Power Considerations**

- ONTs report a loss of power or loss of service
- ONTs can be powered via AC or DC
- Battery backups for high availability
- PoE and PoE+ available



### **Components - Video**

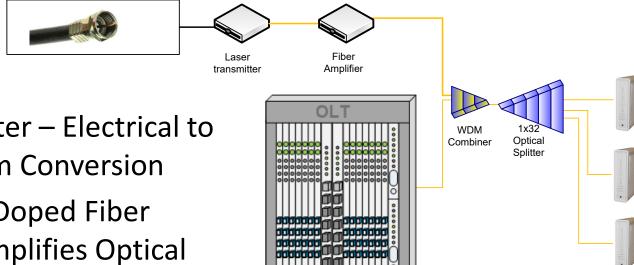

- Laser Transmitter Electrical to Optical 1550nm Conversion
- EDFA (Erbium Doped Fiber Amplifier) – Amplifies Optical Signal to 18 – 21dBm
- WDM Combines Wavelengths



### **Components - Video**

- Laser Transmitter
- EDFA
- RF Nodes
- RFoG/two-way









### **Components – DC Power**

- Most OLTs use -48V DC Power
- Same power used in telco central offices
- Rectifiers required to convert AC to DC
- Properly ground your equipment!





### **Components – DC Power**



- Redundant Inputs
- Redundant Outputs
- Redundant Rectifiers
- Fuse or Circuit Breaker
   Protection
- Network Management
- Basically an external power supply!



## **Centralized Management**

- ONTs Centrally Managed
- No physical ONT management ports
- Same concepts as traditional network
  - VLANs
  - PoE
  - QoS



## **Centralized Management**



### **Management Systems**

- Systems included standard CLI and EMS
- OLT runs without management server
- Application and Web/Mobile
- GUI is more important in PON than legacy networks
  - ➤ Density is far greater!
- ONTs are an extension of the OLT



### **Profiles & Templates**

- Create a standard profile or template for your services
- Apply that profile or template to many ONTs at once!



### **Management Systems Features**

- Alarming and Notification
- Bandwidth Monitoring
- Central OLT & ONT Upgrades
- MAC Searches
- VLAN Member Reports



## **Bandwidth Management**

- Bandwidth Management is Built-in!
- Guarantee every user bandwidth
  - Set a committed rate
  - Committed rates cannot exceed capacity of any link in the system
- Manage additional bandwidth as you desire
  - Set a peak rate



## Managing All The Same Things

The same things you manage today...

- VLANs
- PoE
- QoS
- IIDP
- Network Access Control



### What makes PON a POL?

- 1. Indoor ONTs
- 2. Power over Ethernet
- 3. Internal Packet Switching
- 4. Enterprise Ethernet Features



## Questions?

Introduction to POL Components



### 15 Minute Break



Please respect others and return on time.



# Introduction to POL Design (





### **Section 9 Agenda**

- POL Component and Budget Review
- POL Cable Design Options Overview
- Design Challenge Exercise
- Knowledge Check



### **APC and UPC**

- Ultra Physical Contact Connectors (UPC)
  - Blue




- Angled Physical Connectors (APC)
  - Green





### **Splitter Deployment**

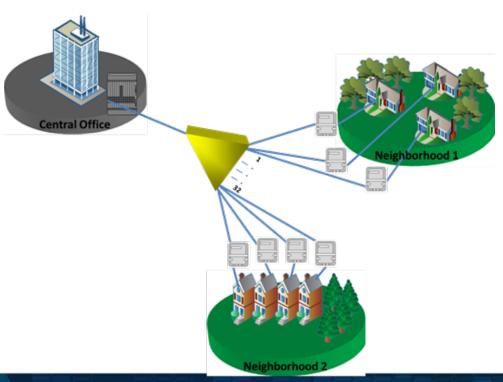


#### Single Splitter

- One splitter in the Optical Distribution Network
- All splitter loss is at one location
- Works for 99% of POL deployments



### **Splitter Deployment**

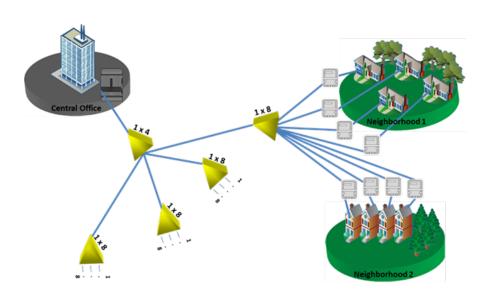

#### **Cascaded Splits**


- Used when end users are geographically dispersed
- Campus out-buildings
- Loss from splitters in path must be summed

#### **Engineered Splits**

Loss may favor a particular output



### **Campus Overview**

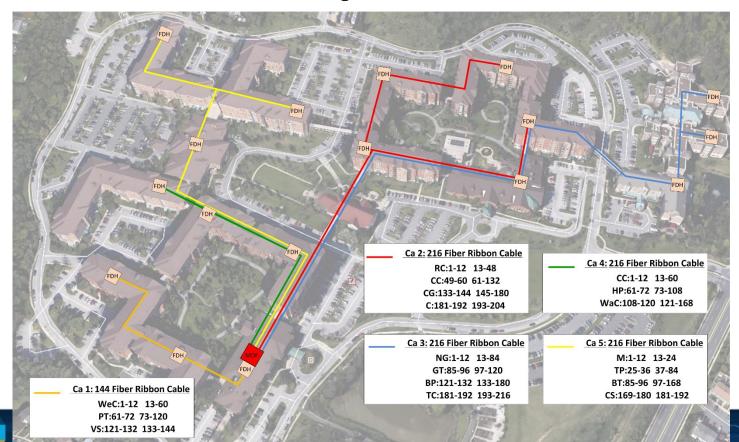



### **OSP Deployment**

- OSP options can be mixed with LAN options
- Be careful of mixing manufacturer product lines due to incompatibility issues
- Many options due to PON history in telecommunications



## **Design Scenario Challenge**

Challenge – Determine the quantity of each component required for Passive Optical LAN design

#### Assumptions:

- 1. Using pre-terminated Fibre throughout
- 2. ONTs will be shared at Cubicles
- ONTs will be mounted under the desks
- 4. ONTs will be locally AC powered
- OLT is located in MDF
- 6. Raised floor throughout building

OLT	1
ONT's	170
WAP's	26
Printers	9



### **Design Questions**

- What RFI Questions would you also need to ask?
  - Produce a list of 6 questions to gain further clarity

Are there any devices that need local UPS?

What future expansion is required?



### **Design Questions**


What design challenges do you see?

What problems do you see POL solving?

What problems do you see POL causing?



**Centralized Split Overview** 

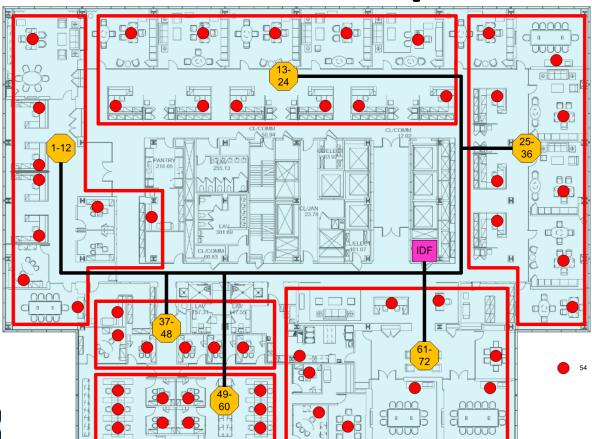



FDH Houses Splitters



### **Centralized Splitting**

- Provides maximum ROI for POL
- Houses splitters in one location per floor
- Installation Labor hours are reduced
- Connection between Riser and Horizontal




### **Centralized BoM**

Area	Product Description	Total Qty
MDF	Rack Mount Fibre Enclosure, 1U, holds 3 MPO Fibre cassettes	
MDF	MPO Fibre Cassette	
IDF	1 x 32 splitter used with FDH	
IDF	288-Port capacity FDH accommodating 18 splitters and 24 MPO outputs	
Horizontal	24 port Consolidation Point w/100m (300') OS2 MPO Cable	
ONT Fibre	SCAPC-SCAPC OS2 Yellow 3 (10')	
OLT Fibre	SCUPC-SCAPC OS2 Yellow 8 (25')	
Horizontal	SCAPC-SCAPC OS2 Yellow 23 (75')	
Horizontal	SCAPC-SCAPC OS2 Yellow 31 (100')	
Horizontal	SCAPC-SCAPC OS2 Yellow 38 (125')	
Horizontal	SCAPC-SCAPC OS2 Yellow 46 (150')	
WAO	4-port White Faceplate	
WAO	SCAPC Singlemode adapter	
WAO	Category 6 modular jack	
WAO	Category 6 Patch Cord, Blue	



# **Zone Split Overview**

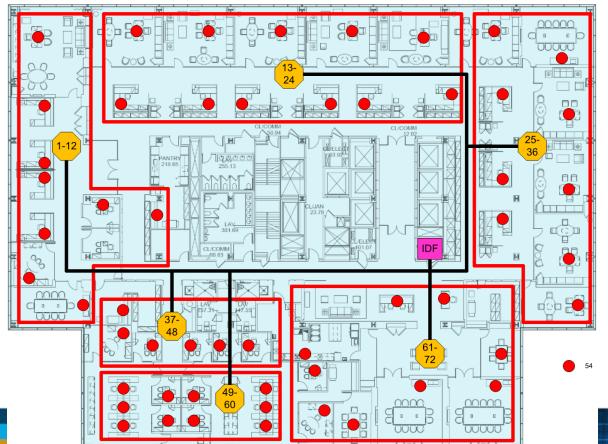



**Zone Splitter Housing** 



### **Zone Splitting**


- Eliminates the need for the IDF
- Places Splitter closer to user
- Location for cross-connects
- Termination for horizontal and feeder fiber
- Moves redundancy closer to the user in Type B applications.



### **Zone BoM**

Area	Product Description	Total Qty
MDF	Rack Mount Fibre Enclosure, 2U, holds 6 MPO Fibre cassettes	
MDF	MPO Fibre Cassette	
IDF	MPO Fibre Cassette  MPO Fibre Trunk 12 Strand Singlemode OS2 30 (100')	
IDF	MPO Fibre Trunk 12 Strand Singlemode OS2 60 (200')	
IDF	MPO Fibre Trunk 12 Strand Singlemode OS2 100 (300')	
Horizontal	1 x 32 Splitter	
Horizontal	Fibre Zone Box	
Horizontal	Fibre Zone Box Installation Kit	
ONT Fibre	SCAPC-SCAPC OS2 Yellow 3 (10')	
OLT Fibre	SCUPC-SCAPC OS2 Yellow 8 (25')	
Horizontal	SCAPC-SCAPC OS2 Yellow 23 (75')	
Horizontal	SCAPC-SCAPC OS2 Yellow 31 (100')	
Horizontal	SCAPC-SCAPC OS2 Yellow 38 (125')	
Horizontal	SCAPC-SCAPC OS2 Yellow 46 (150')	
WAO	Faceplates 4-port White Alpine	
WAO	SCAPC Singlemode adapter	
WAO	Category 6 modular jack	
WAO	Category 6 Patch Lead, Blue	

# **Rack Mount Split Overview**

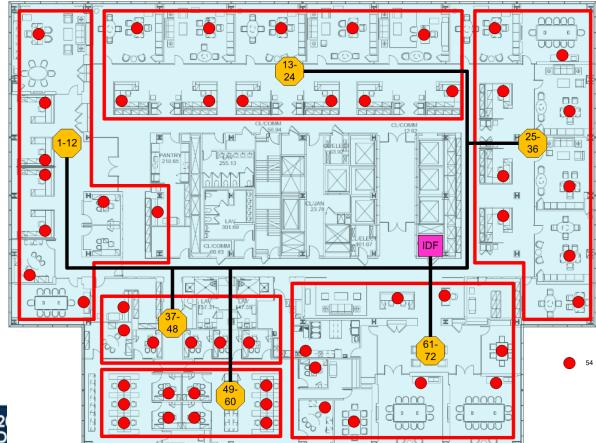



## **Rack Mount Splitting**

- Customer used to look and feel
- Splitters are rack-mounted or installed in fiber housing modules
- Fiber is terminated on patch panels
- Can use Pre-terminated or field connectorized cable



### **Rack BoM**

Area	Product Description	Total Qty
MDF	Rack Mount Fibre Enclosure, 2U, holds 6 MPO Fibre cassettes	
MDF/IDF	MPO Fibre Cassette	
IDF	Wall Mount 2-Post Open Frame Rack Cabinet 8U	
IDF	Rack Mount Fibre Enclosure, 1U, holds 2 MPO Fibre cassettes	
IDF	Rack Mount Fibre Enclosure, 2U, holds 6 Panels	
IDF	SC Adapters, Simplex, APC, 12 F, Single-mode	
Riser	MPO Fibre Trunk 12 Strand OS2 30 (100')	
Riser	MPO Fibre Trunk 12 Strand OS2 60 (200')	
Riser	MPO Fibre Trunk 12 Strand OS2 100(300')	
IDF	Rack Mounted 1 x 32 splitter	
ONT Fibre	SCAPC-SCAPC OS2 Yellow 3 (10')	
OLT Fibre	SCUPC-SCAPC OS2 Yellow 8 (25')	
Horizontal	SCAPC-SCAPC OS2 Yellow 23 (75')	
Horizontal	SCAPC-SCAPC OS2 Yellow 31 (100')	
Horizontal	SCAPC-SCAPC OS2 Yellow 38 (125')	
Horizontal	SCAPC-SCAPC OS2 Yellow 46 (150')	
WAO	Faceplates 4-port White Alpine	
WAO	SCAPC Singlemode adapter	
WAO	Category 6 modular jack	
WAO	Category 6 Patch Lead, Blue	

### **Hybrid Deployments**

- Some deployments choosing hybrid deployments
- Hybrid Ideas
  - Keep IDFs for rack-mount ONTs, but use fiber zone hubs
  - Put ONTs in active zone box and run category cabling to user
  - Use 100% rack-mount ONTs in retrofit scenario



### **Good Design Practices**

- ✓ Meets customer requirements
- ✓ Provides a value to the customer:
  - ✓ Reduced Cost
  - ✓ Power/Space/Cooling
  - ✓ Performance
  - ✓ Longevity
- ✓ Is not overly complex
- ✓ Makes customer happy!



### **End of Day One**

#### **Founding Members:**



www.apolanglobal.org



### **Day 1 Review**






## Passive Optical LAN is a standards based/recognized technology



B. False

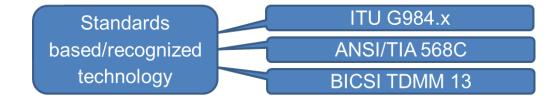



#### Guaranteed bandwidth is possible with...

- ✓ A. Passive Optical LAN
  - B. Switch Based
  - C. Both A and B






#### **POL supports 802.1Q VLANs**




B. False

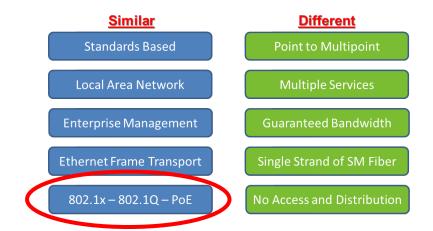



## AES 128 Encryption is present in \_\_\_\_\_\_ direction(s)

- A. The upstream
- B. The downstream
  - C. Both upstream and downstream

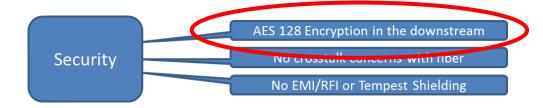




## Gigabit switches provide 1Gb/s connections to every WAO

A. True

🗸 B. False

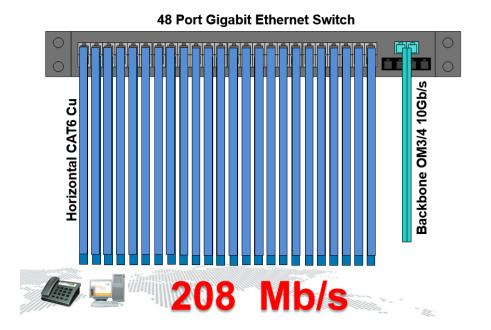



#### Most users consume bandwidth all day long

A. True



Most users use **0**Mb/s over 98% of the workday

Apps (7)
▶ ♠ Microsoft Lync (32 bit)
▶ P Microsoft PowerPoint (32 bit)
Photos
Snipping Tool
▷ 🙀 Task Manager

0%	55.8 MB	0 MB/s	0.1 Mbps
0%	92.6 MB	0 MB/s	0 Mbps
2.3%	192.5 MB	0 MB/s	0 Mbps
0%	0.1 MB	0 MB/s	0 Mbps
0%	2.2 MB	0 MB/s	0 Mbps
1.6%	10.8 MB	0 MB/s	0 Mbps
1.4%	147.3 MB	0 MB/s	0 Mbps



#### This technology uses Dynamic Bandwidth Allocation

A. Switch Based


Switch Data vs. Dynamic Bandwidth Allocation

B. Passive Optical LAN




#### Most users require a sustained GbE connection

A. True



Common LAN Services	Typical Required Bandwidth
Email and Web Browsing	500Kbps
Voice over IP	110Kbps
Cloud-based Services (data storage, enterprise s/w, collaboration, etc) Low	50Kbps
Cloud-based Services (data storage, enterprise s/w, collaboration, etc) High	100Kbps
Wireless Access Point Capacity (IEEE 802.11 a/b/g/n)	24Mbps
Wireless Access Point High Capacity (IEEE 802.11 ac/ad, dual radio)	300Mbps
IP Video Surveillance Standard Definition (MPEG4/H.264)	2Mbps
IP Video Surveillance High Definition (MPEG4/H.264)	6Mbps
IP Video Conferencing / Telepresence (720p-Good, includes primary/auxiliary)	2Mbps
IP Video Conferencing / Telepresence (1080p-Best, includes primary/auxiliary)	15Mbps

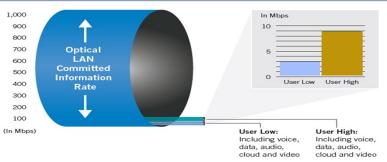



## Upstream (ONT to OLT) analog video utilizes which wavelength?

- A. 1550nm
- B. 1490nm
- C. 1310nm
- D. 1625nm
- E. None


1550nm <u>Downstream</u> ONLY – RF Video



#### A cascaded 1x4 + 1x16 split is a good practice?

A. True



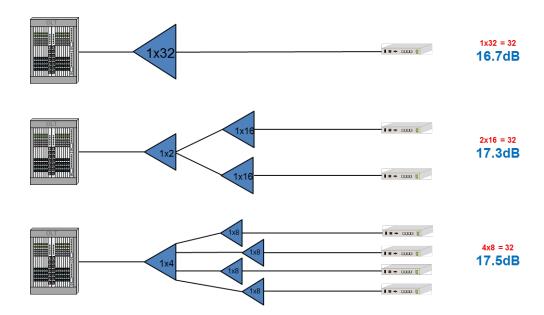




**GPON** bandwidth can be increased by using a lower split ratio

A. True


✓ B. False

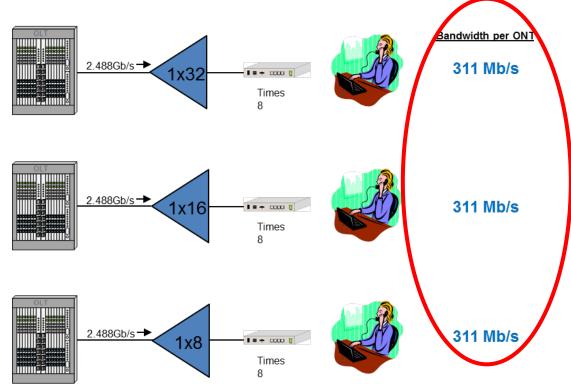



## The minimum loss required between the OLT and ONT is...

- A. 13.5dB
- B. 10.7dB
- **✓** C. 15.5dB
  - D. 17.2dB
  - E. None of these

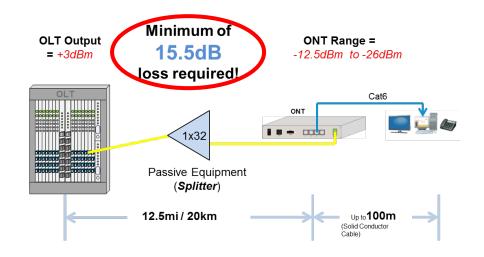



#### PoE in a POL is administered at the...

- A. OLT
- ✓B. ONT
  - C. Injector
  - D. PoE is not possible

#### ONT - Optical Network Terminal

- Active equipment provided by suppliers such as Tellabs and 7hone.
- located near the user or device
- Typically 4 RJ45 (10/100/1000) outputs with optional POE
- Up to 60W of available POE (vendor specific)
- Standard HVAC is adequate
- Optional internal or external battery back-up
- POTS and COAX ports available
- Establishes and maintains secure AES 128 Encryption
- Supports multiple VLANs on each port





#### Which of these are a benefit of POL?

- A. Reduction in power
- B. Reduction of fire load
- C. Reduction of nonrenewable materials

D. All of these are benefits

#### **Green Benefits**

Reduction in power consumption
Reduction in non-renewable materials
Ceiling space and fire load savings
Reduction in cabling costs
Floor space savings



#### **LEED Credits are**

- ✓ A. Possible with POL
  - B. Automatic with POL
  - C. Guaranteed with POL
  - D. Not Possible with POL

- Energy and Atmosphere Credit 1 (1-3 pts).
  - Reduction in TRs, HVAC equipment, switch equipment, UPS, lighting and other energy needs.
  - The PON system helps the overall efficiency of the energy systems.
- Innovation in Design Credit 1 (1-4 pts).



- The PON system utilizes less equipment, resulting in less raw materials, less garbage, less transportation and reduced time for implementation and commissioning.
- In addition, utilizing a fiber system ensures the life of the system extends beyond the life of a conventional "switched" system.

\*not guaranteed or implied



## My retained knowledge of Passive Optical LAN from yesterday was...

- A. A little
- B. A lot
- C. What is Passive Optical LAN?
- D. None




### Questions?

Day 1 Review




#### **Assumptions**

- Using pre-terminated fiber throughout
- ONTs will be shared at Cubicles
- 3. ONTs will be mounted under the desks
- ONTs will be locally AC powered
- 5. OLT is located in MDF
- 6. Raised floor throughout building

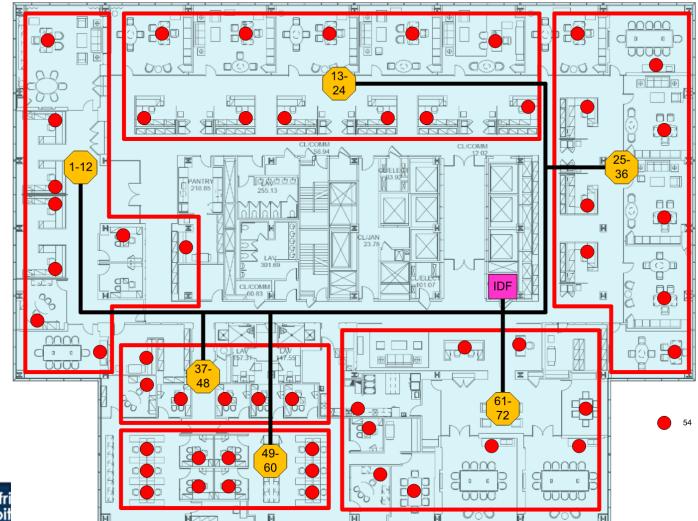

**Centralized Split Overview** 

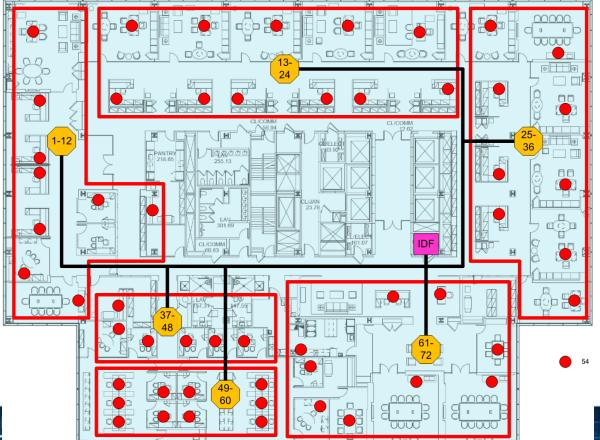



FDH Houses Splitters



Consolidation Point


Zone Cabling Middle BAS

### **Centralized Scenario Answers**

Area	Product Description	Total Qty
MDF	Rack Mount Fibre Enclosure, 1U, holds 3 MPO Fibre cassettes	
MDF	MPO Fibre Cassette	
IDF	1 x 32 splitter used with FDH	
IDF	288-Port capacity FDH accommodating 18 splitters and 24 MPO outputs	
Horizontal	24 port Consolidation Point w/100m (300') OS2 MPO Cable	
ONT Fibre	SCAPC-SCAPC OS2 Yellow 3 (10')	
OLT Fibre	SCUPC-SCAPC OS2 Yellow 8 (25')	
Horizontal	SCAPC-SCAPC OS2 Yellow 23 (75')	
Horizontal	SCAPC-SCAPC OS2 Yellow 31 (100')	
Horizontal	SCAPC-SCAPC OS2 Yellow 38 (125')	
Horizontal	SCAPC-SCAPC OS2 Yellow 46 (150')	
WAO	4-port White Faceplate	
WAO	SCAPC Singlemode adapter	
WAO	Category 6 modular jack	
WAO	Category 6 Patch Cord, Blue	



### **Zone Split Overview**

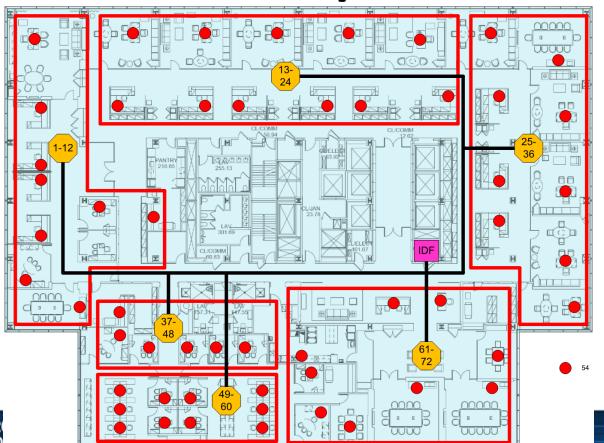




**Zone Splitter Housing** 



### **Zone Scenario Answers**

Area	Product Description	Total Qty
MDF	Rack Mount Fibre Enclosure, 2U, holds 6 MPO Fibre cassettes	
MDF	MPO Fibre Cassette	
IDF	MPO Fibre Trunk 12 Strand Singlemode OS2 30 (100')	
IDF	MPO Fibre Trunk 12 Strand Singlemode OS2 60 (200')	
IDF	MPO Fibre Trunk 12 Strand Singlemode OS2 100 (300')	
Horizontal	1 x 32 Splitter	
Horizontal	Fibre Zone Box	
Horizontal	Fibre Zone Box Installation Kit	
ONT Fibre	SCAPC-SCAPC OS2 Yellow 3 (10')	
OLT Fibre	SCUPC-SCAPC OS2 Yellow 8 (25')	
Horizontal	SCAPC-SCAPC OS2 Yellow 23 (75')	
Horizontal	SCAPC-SCAPC OS2 Yellow 31 (100')	
Horizontal	SCAPC-SCAPC OS2 Yellow 38 (125')	
Horizontal	SCAPC-SCAPC OS2 Yellow 46 (150')	
WAO	Faceplates 4-port White Alpine	
WAO	SCAPC Singlemode adapter	
WAO	Category 6 modular jack	
WAO	Category 6 Patch Lead, Blue	

### **Rack Mount Split Overview**

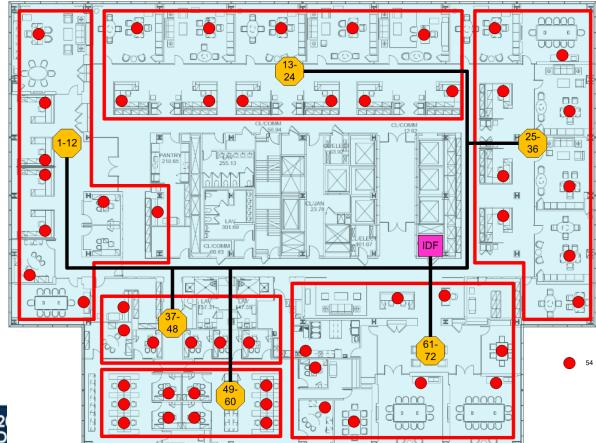



### **Rack Scenario Answers**

Area	Product Description	Total Qty
MDF	Rack Mount Fibre Enclosure, 2U, holds 6 MPO Fibre cassettes	
MDF/IDF	MPO Fi bre Cassette	
IDF	Wall Mount 2-Post Open Frame Rack Cabinet 8U	
IDF	Rack Mount Fibre Enclosure, 1U, holds 2 MPO Fibre cassettes	
IDF	Rack Mount Fibre Enclosure, 2U, holds 6 Panels	
IDF	SC Adapters, Simplex, APC, 12 F, Single-mode	
Riser	MPO Fibre Trunk 12 Strand OS2 30 (100')	
Riser	MPO Fibre Trunk 12 Strand OS2 60 (200')	
Riser	MPO Fibre Trunk 12 Strand OS2 100(300')	
IDF	Rack Mounted 1 x 32 splitter	
ONT Fibre	SCAPC-SCAPC OS2 Yellow 3 (10')	
OLT Fibre	SCUPC-SCAPC OS2 Yellow 8 (25')	
Horizontal	SCAPC-SCAPC OS2 Yellow 23 (75')	
Horizontal	SCAPC-SCAPC OS2 Yellow 31 (100')	
Horizontal	SCAPC-SCAPC OS2 Yellow 38 (125')	
Horizontal	SCAPC-SCAPC OS2 Yellow 46 (150')	
WAO	Faceplates 4-port White Alpine	
WAO	SCAPC Singlemode adapter	
WAO	Category 6 modular jack	
WAO	Category 6 Patch Lead, Blue	

### **Design Questions**

What RFI Questions did you ask?



### **Design Questions**

What design challenges do you see?

What problems do you see POL solving?

What problems do you see POL causing?



### Questions?

Passive Optical LAN Design



#### 15 Minute Break



Please respect others and return on time.



# Passive Optical LAN Power Survivability





### **Section 6 Agenda**

- Survivability
- Verticals
- Types
- Hardware and Cabling
- When, Where, and How
- Knowledge Check



### What is survivability

 Survivability: the capability of a system or organization to withstand a disaster or hostile environment, without significant impairment of its normal operations.



### Why Would We Need Survivability








# **Power Over Ethernet Requirements**



# **Non-PoE Requirements**

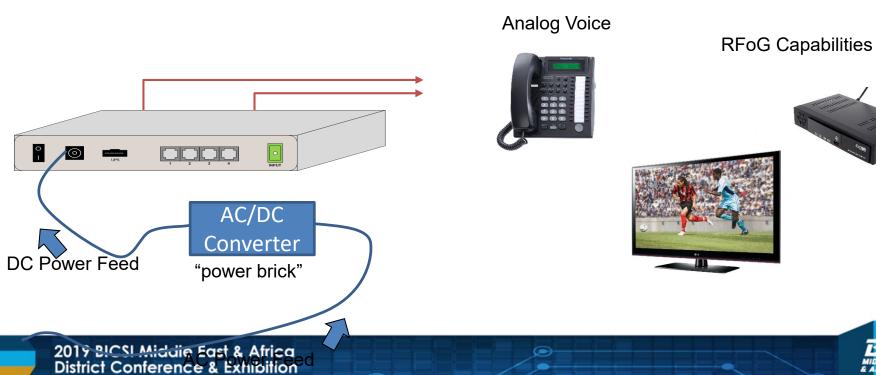

# What's The Impact





# **ONT Placement Can Define Powering**

AC = Local

DC = Remote



Wall-mount



Ceiling tile mount



Secure Wall Box



Wall Plate ONT



Wall Plate ONT



## What Needs to Survive

**VoIP Handsets** 





**RFID** 



PTZ Camera



AV Control Systems







**Access Control** 







## **Call Centers/ Critical Services/ Financial**



# Healthcare

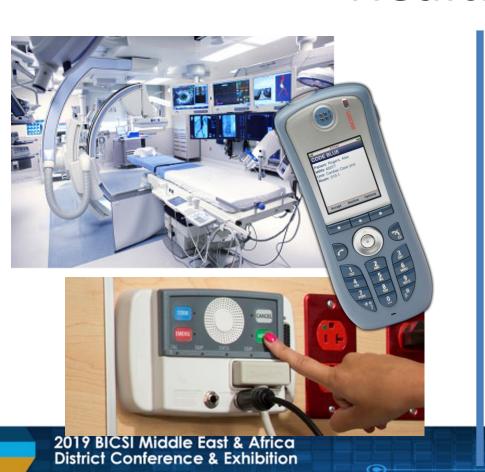



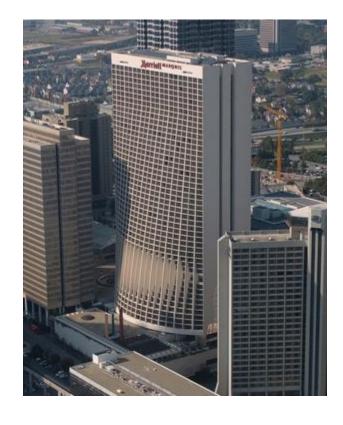

# Hospitality





## **Commercial Business and Education**










2019 BICSI Middle East & Africa
District Conference & Exhibition

# **Different Ways to Survive**

- Local battery
- Remote:
  - Powered
  - Battery
  - Generator
- AC power on generator "Emergency power"

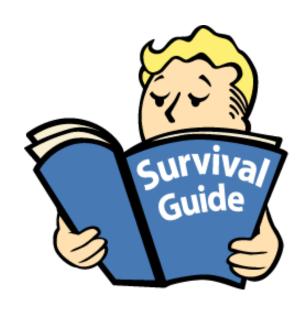





## **Local Batteries**











## **Local Batteries**

#### PROs

- Place them only where needed
- Low cost/ commitment
- May already be using UPS at desk

#### CONs

- Replacement after several years
- More items to manage
- Limited uptime
- Battery failure



## **Remote Power**

- Remote power means to power multiple devices from a DC power station which can be either distributed or centralized.
  - Distributed remote power is typically located in an IDF or zone distribution box and can be remotely powered from a DC power plant from the MDF
  - Centralized remote power is typically in the MDF feeding localized power distribution units to feed ONT's
  - Voltage options: 48vdc 54vdc



# Why Remote Line Power?



AC access not required at each ONT



Reduces CapEx and OpEx





Battery backup provided in centralized location rather than at each ONT




Reduces time to market & enables rapid deployment



## **Power Connectors**

Locking preferred for remote power applications











## **Power Connectors**

Non-locking connector introduces risk







## **Power Connectors**




Be creative but not sloppy






## **48vdc Centralized**

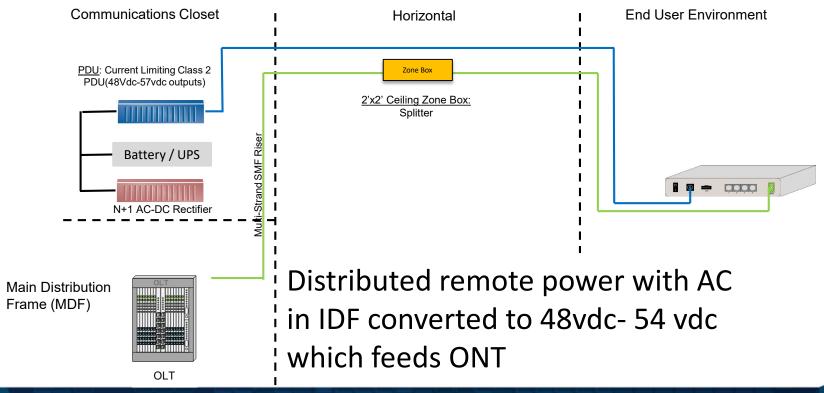

## **48vdc Distributed**

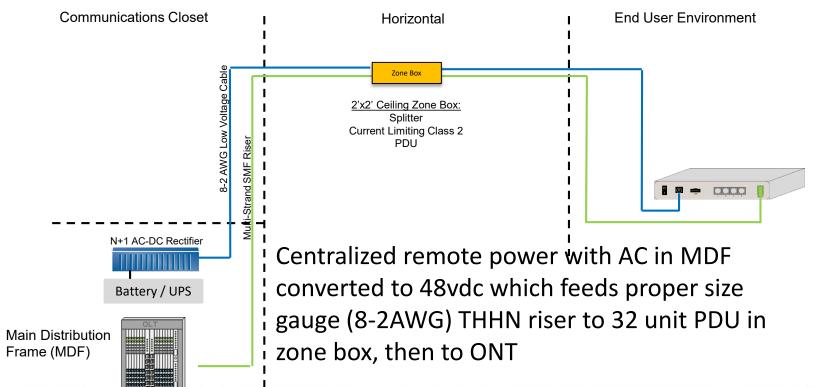

## **Remote Power**

#### PROs

- Survivability, battery back up can be sized to any customer requirement
- Eliminates AC plug and wall wart at ONT
- Centralizes battery backup
- Remote power reset of an ONT and device

#### CONs

- Level 4 DC Technician
- Power Engineer is required
- Requires additional power in MDF
- Electrical contractor will take a loss



### **Cost Savings Summary**

#### **Capex Savings**

- Eliminating need to run AC power to each ONT location reduces cost for cabling, conduits, and electricians
- Reduced space required at each ONT

#### **Opex Savings**

- Eliminating batteries at remote sites reduces ongoing battery maintenance cost
- Remotely accessible system minimizes need for site visits for troubleshooting & alarming
- Reduction in power consumption through improved power conversion efficiency and lower HVAC requirements



## **Remote Power Caution**

- What happens when you have a coil of copper cable and send constant DC voltage through it?
- Trimming to avoid the coil means you've limited future flexibility
- Not all ONTs are 48vdc
- Consult a Certified DC Engineer for proper design







## **AC Generator Power**

- Alternating Current (AC) power
  - Installed on dedicated "emergency" circuits
  - Circuits fed from dedicated panels
  - Panels powered with dedicated feeders from generator power





## **AC** Generator Power

- PROs
  - Survivability
  - Not limited to run time of battery

- CONs
  - Added cost / complexity
  - Requires licensed electrician to install vs. low voltage contractor
  - Requires space outside of facility to house



# **Rectifier Hardware Options**











# **PDU Hardware Options**



# **Cabling Options**

- Solid vs. Stranded
- Hybrid composite cable
- Separate cables
- Use existing copper




## Solid vs. Stranded Conductor









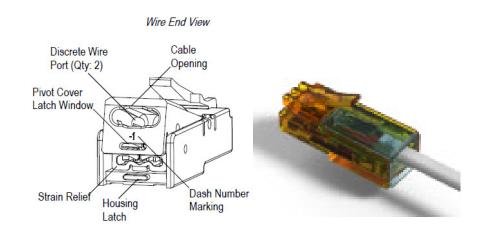





## Solid vs. Stranded Conductor

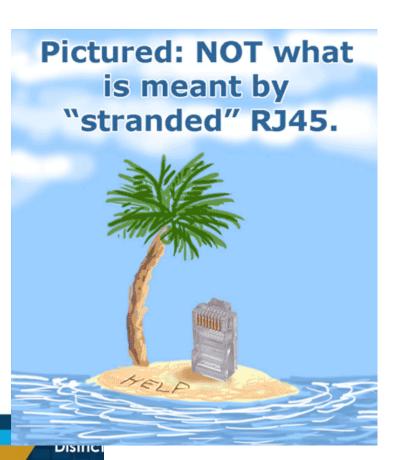

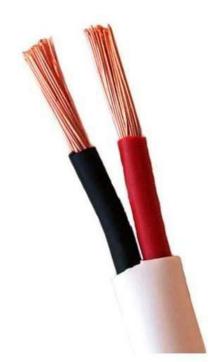


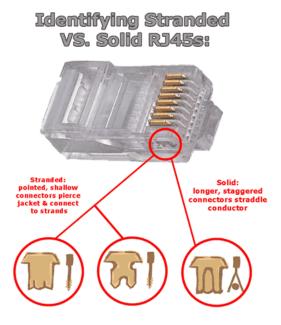

# **Composite Cable**






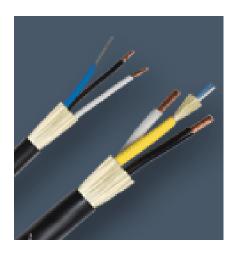





# **Separate Cables**

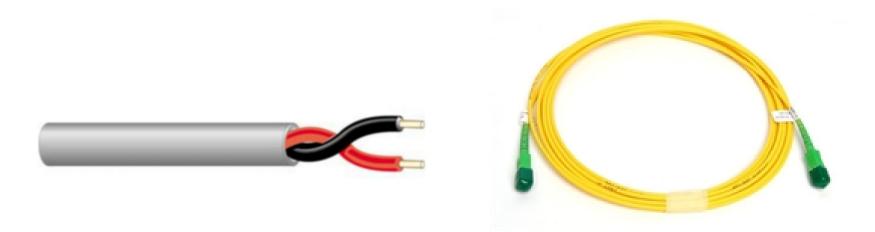



# **Considerations for Cabling**

- Will the copper and fiber originate in the same location? This will significantly impact your decision for Composite or Separate cables.
- Repurposing existing Cat-X cable as your power carrier is a benefit and reduces costs for cable and installation.



#### **Power System Design Process**

#### **Step 1: Get the Numbers**

- How many ONTs are required?
  - Per floor?
  - Per building?
  - Per sector?
- What is the rated power consumption of the ONTs?
- Will PoE+ be supplied by the ONT?

#### **Step 3: Consider Other Factors**

- What is the desired runtime?
- Which circuits are considered Emergency circuits?
- What are future growth and expansion expectations?

#### **Step 2: Follow the Fiber Plan**


- Where are the distribution points?
- Are IDF closets or electrical rooms available for power?
- What is the maximum distance from a distribution point to an ONT?

#### **Step 4: Determine Power Architecture**

- Distributed DC Plants
- Centralized DC Plants




## **How Far Can It Reach?**

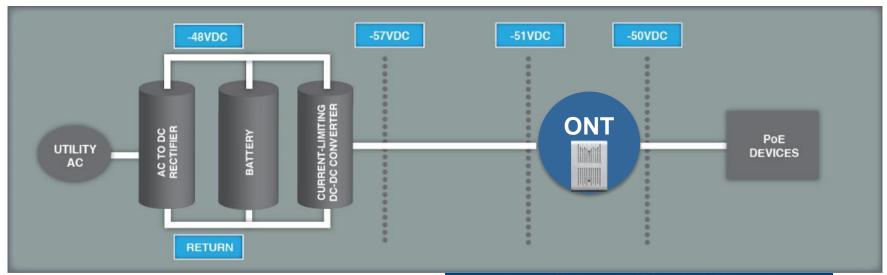

- •6Vdc allowable voltage drop in cable to meet PoE+ standard at ONT
- •1Vdc drop across ONT

Max Distance to ONT Supporting PoE+					
Load (Watts)	Cable Gauge (AWG)				
	20	18	16	14	12
90	100	160	250	400	640
80	150	250	400	625	1000
70	175	275	450	725	1150
60	200	325	525	850	1350
50	250	400	625	1000	1600
40	300	500	800	1250	2050
30	400	650	1050	1700	2700

#### **Design Architecture: Centralized DC Plants**

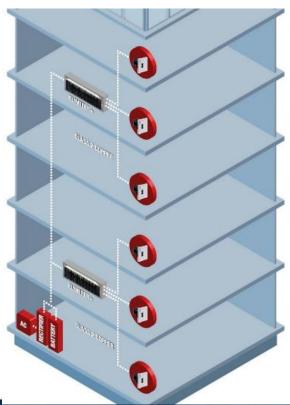

#### **Pros**

- Single DC plant and batteries to maintain
- Less space per floor required for power equipment

#### Cons

- · Cabling cost to run Class 1 circuits to each Zone
  - Conduit
  - Electrician
  - Large AWG cable
- •48Vdc Plant and Battery must be larger to offset cable losses



#### **Design Architecture: Distributed DC Plants**



#### **Pros**

- All DC cabling will be NEC Class 2 compliant
- Installation cost
- Equipment cost

#### Cons

- Space must be found for power equipment in IDFs
- Distributed batteries are more difficult to maintain
- Additional AC circuits required to each rectifier location



## Design Example

ONT Count by IDF	1-2 Port ONT	DC WATTS	4 Port ONT	DC WATTS	8 Port ONT	DC WATTS	24 Port ONT (AC)	500W 120VAC	Total ONT	Total DC load	DC Power system Load	Total AC load (W)	# of Ch
IDF 3D	47	30	3	80	0	80	1	500	51	1650	2145	500	50
IDF MDF	47	30	7	80	0	80	1	500	55	1970	2561	500	54
IDF 3A	45	30	12	80	0	80	1	500	58	2310	3003	500	57
IDF 2F	48	30	10	80	2	80	1	500	61	2400	3120	500	60
IDF 2E	50	30	11	80	7	80	1	500	69	2940	3822	500	68
IDF 1A	58	30	21	80	0	80	1	500	80	3420	4446	500	79
IDF 2A	56	30	18	80	5	80	1	500	80	3520	4576	500	79
IDF 4A	62	30	24	80	0	80	1	500	87	3780	4914	500	86
IDF 2C	77	30	18	80	3	80	1	500	99	3990	5187	500	98
IDF 1Z	61	30	36	80	1	80	1	500	99	4790	6227	500	98
IDF 3C	76	30	34	80	1	80	1	500	112	5080	6604	500	111
IDF 5A	87	30	28	80	7	80	1	500	123	5410	7033	500	122
Total Of	714		222		26		12		974	41260	53638	6000	962



## **Deployment Methodologies**

- What is the design architecture?
- What is the end user survivability requirement?
- Cabling and infrastructure approach
- Maintaining flexibility and future management in your network.



## Knowledge Check





# Does a 48VDC remote power system fed by an AC plug in require a licensed electrician for installation?

A. Yes

✓ B. No

C. Sometimes



## Can a class 2 circuit be installed in plenum space without the use of conduit?

A. Yes

B. No

C. Sometimes



## Questions?



#### 60 Minute Lunch Break



Please respect others and return on time.



## **POL Testing Considerations** (





#### **Fiber Connectors**


#### SC/APC is default standard in PON networks

- APC connectors reduce reflectance
- Reduce damage to transmitters and amplifiers
- Allow injection of Analog Video



#### **APC and UPC**

- Ultra Physical Contact Connectors (UPC)
  - Blue





- Angled Physical Connectors (APC)
  - Green






## **Endface Comparison**

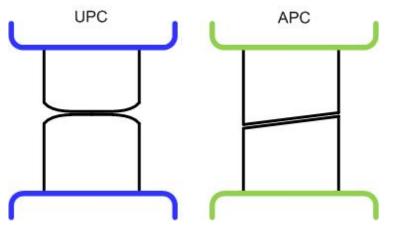




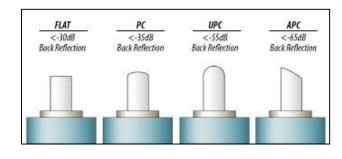

Source: FOA.ORG




## APC vs. PC (un-mated)

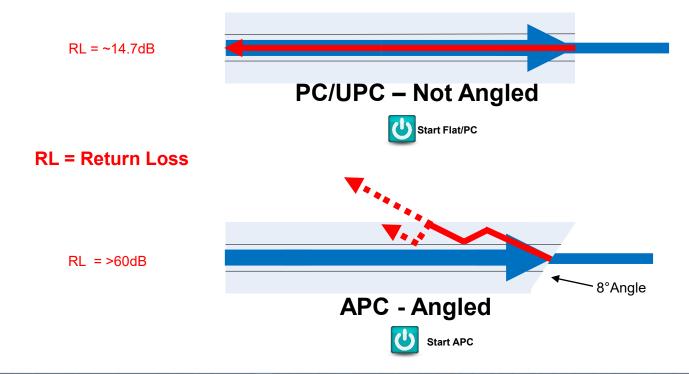



## APC vs. PC (mated)

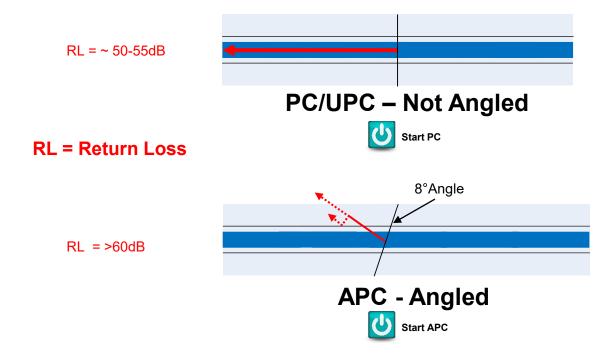



## Importance of Cleaning




# cause of fiber network failures is contaminated connectors

- NTT-Advanced Technology Research, 2010

80% of network problems are due to dirty connectors!




## Importance of Cleaning

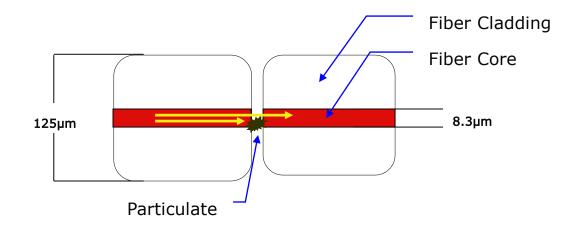




#### **Common Contaminants**

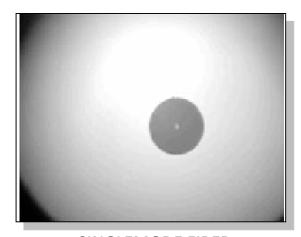


SINGLEMODE FIBER


End face should be free of any contamination or defects,




**Dust Particles** 



Finger Prints



Hand Lotion



Alcohol Residue


- Dust
- Skin oil
- Alcohol residue
- Distilled water residue
- Vegetable oil
- Hand lotion
- Dryer lint
- Saltwater residue
  - Graphite








#### **Contaminate Transfers**

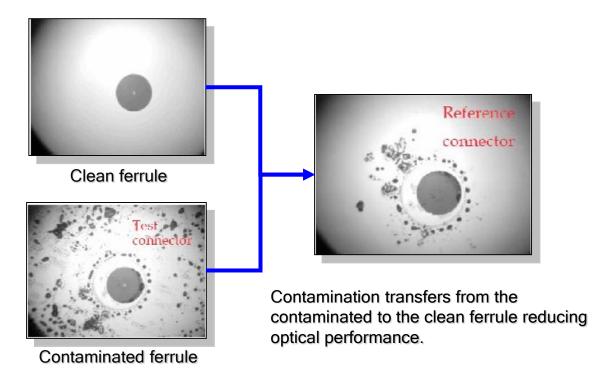



#### **And Migrates**

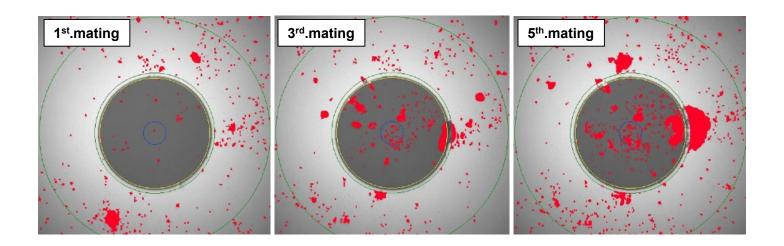

Dirt on connectors moves to the middle of the ferrule!!!

Source: IEC standard committee



## **Testing**

- Key is to verify cable plant performance and connectivity
- Splitters are passive, usually trouble free
- Look for issues at connectors and jumpers
- Be aware if disconnecting before a splitter, a number of users on the channel will lose service



## **Testing**

- Test in one direction. Light source at the OLT and power meter at the ONT locations.
- Ideally use a PON specific Light Source/Power Meter set to test 1310/1490/1550nm
- An alternate option is to use a standard Light Source/Power Meter at 1310nm and 1550nm
- OTDRs can be used for troubleshooting faults found in power meter testing, but are not used to certify links

## **Testing**

 Testing with splitters: 3dB loss for each 1:2 split (excludes connections)

• ANSI/TIA 568C.3 = max .75dB per mated pair

• Singlemode <u>cable</u> = 0.5dB/km

Bend insensitive cable can be helpful



## **Optical LAN Link Budget**

- Max distance limited by attenuation, fiber loss. Splitters and connections contribute.
- Most budgets between 15.5 & 28dB; smaller splits and shorter cables require attenuators

Loss Contributor	<b>GPON Budget</b>
Splitter (1:32) =	16.7dB
Fiber Loss 10Km=	5dB
Conn/Splice Loss=	<u>3.6dB</u>
	25.3dB


Attenuation	Loss (Maximum)	Unit	
Optical Loss 1310 nm	0.5	dB/Km	
Optical Loss 1490 nm	0.5	dB/Km	
Optical Loss 1550 nm	0.5	dB/Km	
Splice Loss per unit	0.3	dB	
Connector Loss	0.75	dB	
1x32 PON Splitter	16.7	dB	
1x16 PON Splitter	13.5	dB	
1x8 PON Splitter	10.3	dB	
1x4 PON Splitter	7.2	dB	




#### **Centralized Split Test Layout (Downstream)**

Measure at 1310nm/1550nm Document admin/labeling scheme Less than 23dB = Pass\* (at points 2) or (3)) Consolidation Point Paths on the same splitter should be uniform in loss Fiber Distribution Housing 288F Measure here for ports (3)that go to a WAO Light Measure here for ports that Source are connected to a splitter and stop at the RDT SC/AP Assumes 1x32 or 2x32 Splitter

#### **Zone Split Test Layout (Downstream)**

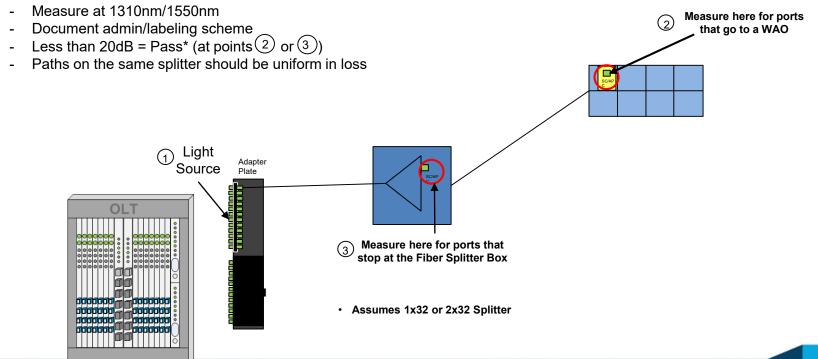


#### **Zone Split (Cascaded) Test Layout (Downstream)**

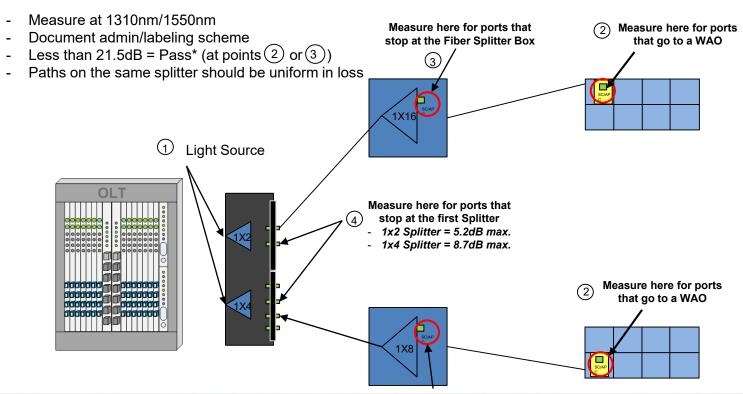

#### **Rack Mount Split Test Layout (Downstream)**


- Measure at 1310nm/1550nm
- Document admin/labeling scheme
- Less than 19.75dB = Pass\* (at points 2 or 3)
- Paths on the same splitter should be uniform in loss

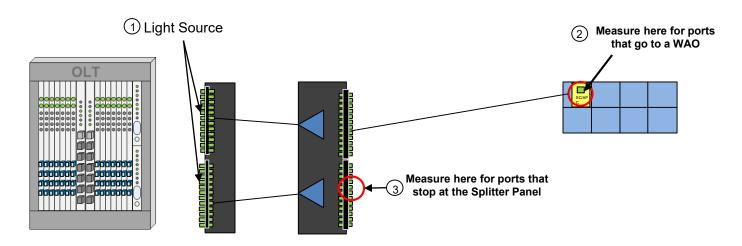

· Assumes 1x32 or 2x32 Splitter




# Hybrid PON/Traditional Test Layout (Downstream/Upstream)

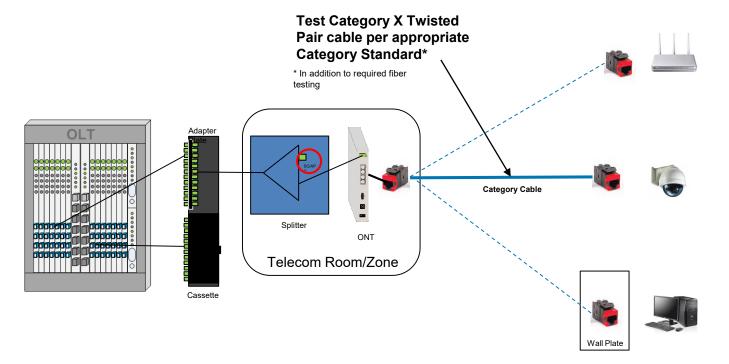



#### Move, Add, Change (MAC) Testing

Once the splitter input is connection is made to the OLT, it cannot be disconnected for testing of MACs without disruption to the other users. When a move, add, or change is made on an active PON circuit, verification must be made to ensure that the proper range of power in dBm will be fed to the ONT. There is a minimum and a maximum value that is acceptable per ITU G.984X. This is verified by placing the connector that will connect to the input of the ONT into an Optical Power Meter and measuring the power in dBm to verify that it is between the minimum and maximum level.

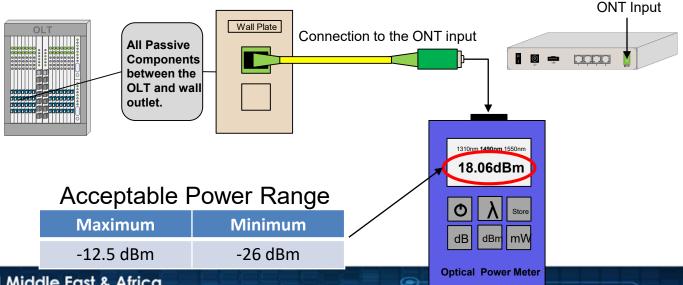

## Referencing the meter







(Never include this lead when referencing/zeroing the power meter)



#### **Link Test with WAO**

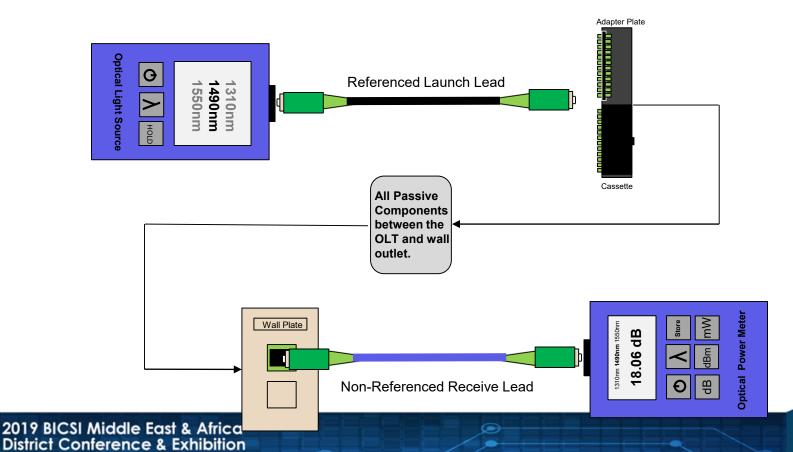


## **Poke Through**

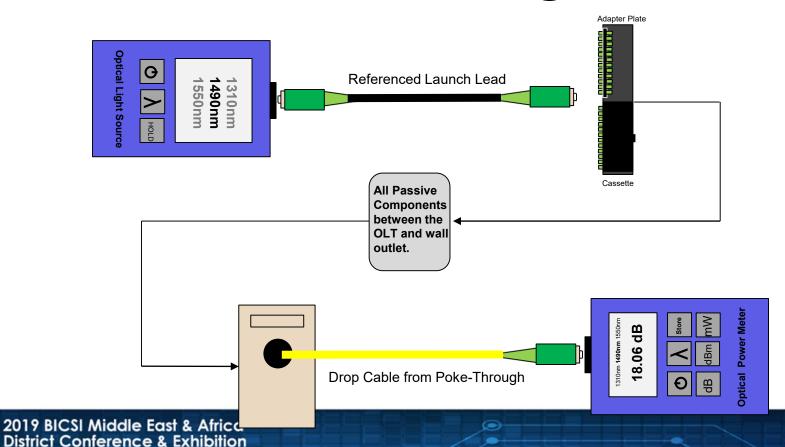



#### **Mid-Point Verification**

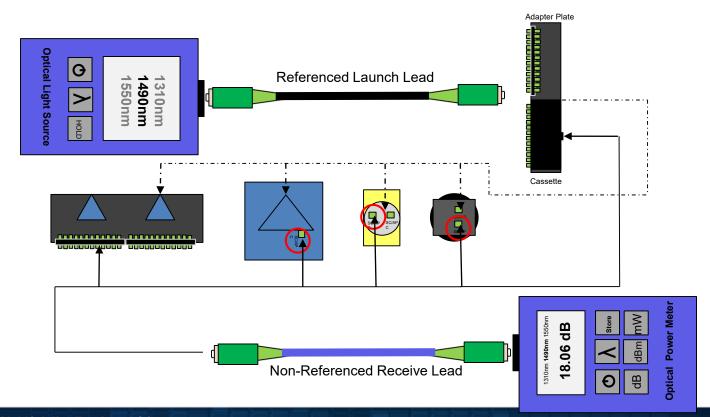



## Knowledge Check





#### This is the common POL connector

✓ A. SC/APC

B. ST

C. MT-RJ

D. FC



#### POL Networks use this fiber...

A. Multimode



✓ B. Singlemode

C. Unimode

D. OM3



It is important to ensure connector endfaces are clean prior to mating



B. False



#### Contaminate on fiber connectors can

- A. Transfer
- B. Migrate
- C. Block light
- ✓ D. All of the above



# You should always use a wet cleaning method to remove contamination

A. True





A reduction of 3dB of light signal reduces the received power by...

A. 10%



C. 12 Volts



When testing a POL with an OTDR, you should test in this direction...



A. Upstream

B. Downstream

C. Sideways



# Loss budgets should be determined by advertised "Typical" performance values

A. True





# Questions?

**POL Testing Considerations** 



# Passive Optical LAN Integration & Management





# **Agenda**

- PON Communications
- ONT Ranging Process
- RF Video Injection
- Centralized Administration
  - Management Server vs CLI
- Templates & Profiles
- VLAN Creation
- Uplink Provisioning
  - Link Aggregation Groups

- ONT Deployment & Discovery
- ONT Provisioning
  - FSAN Type B Protection
- Bandwidth Calculations & Assignment
- Traffic Flow
- Tagging, LLDP, PoE, QoS
- STP & Loop Detection
- Multicast



# **Objectives**

After successfully completing this course, you should be able to:

- Understand the differences between ITU and IEEE PON Standards
- Describe the ONT ranging and provisioning process
- Understand the basic steps for deploying a POL
- Understand the future PON standards



#### Standards – IEEE vs. ITU

- ITU and IEEE have separate standards for PON
- Both standards use the same passive infrastructure (fiber & splitters)
- The primary difference is the electronics




# **Popular Standards Comparison**

	EPON	GPON
Standard	IEEE 802.3ah	ITU G.984
Speed	1Gbps Symmetrical	2.4Gbps Down / 1.2 Gbps Up
Framing	Ethernet (mostly native)	GEMS Encapsulation
Wavelengths	1490nm/1310nm	1490nm/1310nm
Dynamic Bandwidth	Optional Vendor Specific	Built-in
Encryption	Optional Vendor Specific	AES-128 Downstream




#### **Standards Timeline**

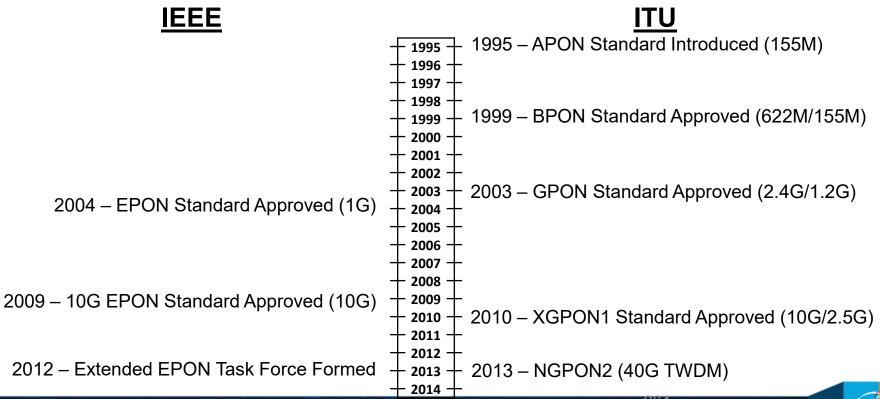

# WDM Methodology

- Multiple wavelengths over the same physical strand of glass
- Wavelengths do not interfere with each other
- Allows multiple discreet communications


#### wavelength-division multiplexing (WDM)

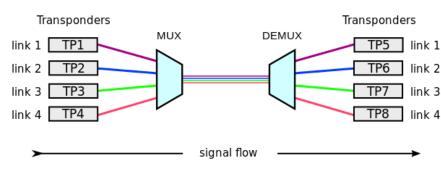

"WDM operating principle" by Xens - Own work. Licensed under Creative Commons Attribution-Share Alike 3.0 via Wikimedia Commons - http://commons.wikimedia.org/wiki/File:WDM operating principle.svg#mediaviewer/File:WDM operating principle.svg



#### **WDM** in PON

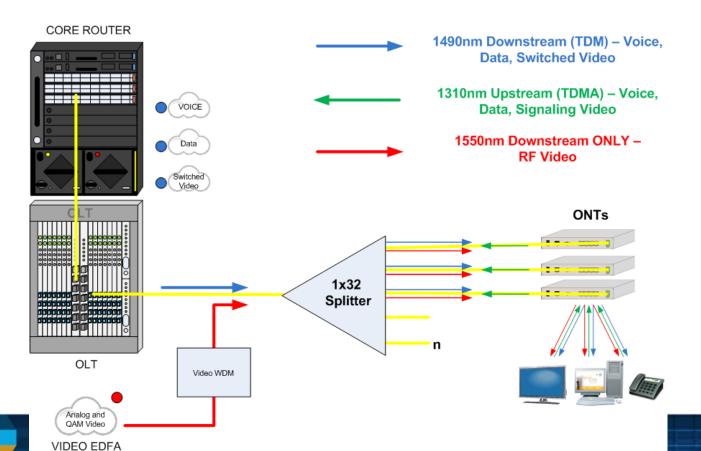


# **PON Types**

- **BPON (Broadband PON)** is an older version of PON technology which is based on ITU specifications and is characterized by an asymmetrical 622 Mbps downstream and a 155 Mpbs upstream optical line rate. Earlier versions of Verizon's FiOS™ offering in the U.S. are based on BPON but more recent implementations of FiOS use GPON technology.
- **GPON (Gigabit PON)** is the latest ITU specified PON network and is characterized by a 2.4 Gbps downstream and a 1.25 Gbps upstream optical line rate. The first significant commercial deployments of GPON began in early 2008. Most carrier implementations of GPON are in the U.S. however it is beginning to proliferate in European markets as well.
- **EPON (Gigabit Ethernet PON or GEPON)** is an IEEE standards based PON system characterized by a symmetrical 1.25 Gbps optical line rate. EPON is the predominant PON solution since it has been commercially available since 2001. GEPON has been primarily deployed in Asian Pacific markets. Recently, 10Gbit/s EPON or 10G-EPON was ratified as an amendment (IEEE 802.3av) in the IEEE 802.3 standard and provides for an asymmetrical 10 Gbps downstream/1 Gbps upstream rate as well as a symmetrical 10 Gbps rate.
- WDM PON (Wave Division Multiplexing PON) is an emerging technology which leverages the optical advances of dense wave division multiplexing (DWDM) to provide a dedicated wavelength to a single ONT. Implementations range from "tunable" optics which must be matched to the ONT's optics to a dynamic optical locking capability which automatically assigns a wavelength to the ONT at the ranging phase. WDM PONs utilize an arrayed waveguide grating (AWG) to multiplex up to 32 wavelengths of light onto a single fiber in the same way a passive optical splitter does. Unlike a typical optical splitter however, an AWG utilizes a phase shift in the optical light to provide an output on each fiber that only receives a certain wavelength of light.


#### **Downstream Communication**

The OLT transmits a signal downstream that all of the ONTs receive (point-to-multipoint). In the downstream direction, the information is broadcast on a specific color (wavelength) of laser light. The information is encoded into digital form and given a specific address that matches a specific ONT. The ONT that matches the address receives the signal and forwards the information to the end-user Ethernet port as depicted below.

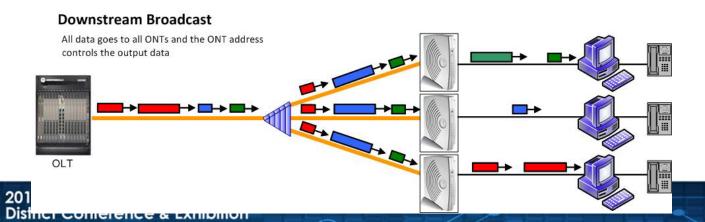

## **Upstream Communication**

Since many ONTs are placed on the same fiber, each with their own laser, upstream communications must be coordinated so that they do not interfere with each other. This is done by synchronizing the ONTs and requiring each to send information to the OLT (Upstream) in a specific time window (TDM). The upstream laser color is different from the downstream laser, so the upstream signal will not interfere with other ONTs on the PON. Using the WDM technique, ONTs do not interfere with each other; the upstream signals do not interfere with downstream signals, and the upstream and downstream signals can communicate at the same time (full duplex). This mechanism for converged, duplex communication is depicted below.

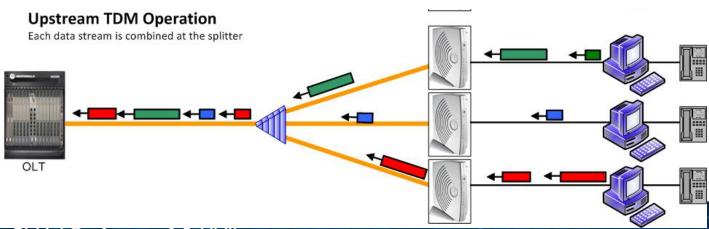



#### **GPON Bandwidth**

- GPON upstream bandwidth is directly correlated to TDMA time slot
- Each ONT will get a number of timeslots allocated. Each frame is  $125\mu s$  in length

- Static bandwidth management
- Dynamic Bandwidth Allocation (DBA)
  - DBA is specified in ITU 984.3. This feature is used to grant upstream bandwidth to ONUs based on their demand
  - Used for oversubscribing GPON links




# **ONT Ranging Process**

- 1. Authorize ONT to be on the PON
- 2. Determine distance from OLT
- 3. Setup OMCI communications
- 4. Assign bandwidth timeslots
- 5. Upgrade ONT software
- 6. Assign VLANs, QoS, PoE, security, etc.



#### **RF Video**

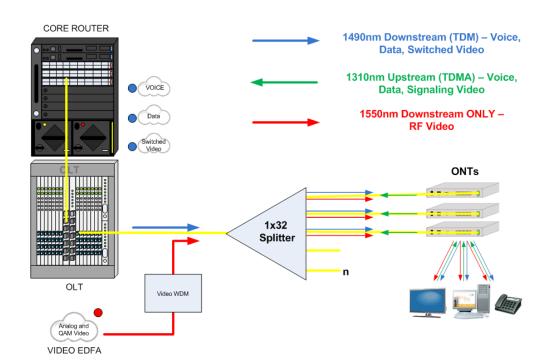


Additionally, an analog signal can be injected onto the same PON fiber, using yet another color of light (WDM techniques). This is called an overlay and is generally used to carry broadcast TV to the user's location. As with data and voice propagation, the light is a different color and therefore does not interfere with the other signals being carried on the fiber cable.



#### **RF Video**

- 1. Video Source (Coax)
- 2. Laser Transmitter
- Erbium Doped Fiber Amplifier (EDFA)
- 4. WDM

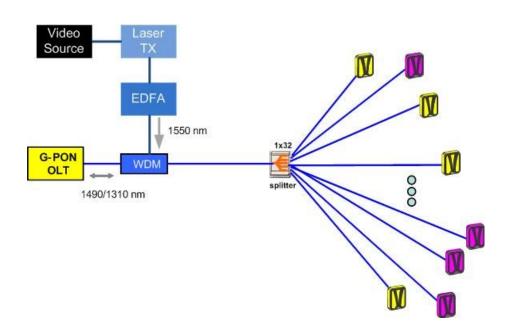



#### **Centralized Administration**

- Reduce Operations & Maintenance (O&M) by reduced the amount of equipment managed
  - ONTs are managed by the OLT
- No powered devices in the middle of the network
  - Same location as user
- Co-locate OLT with other IT gear
  - Same location as other gear
- OLT handles activation, administration, and provision
- No administration ports on ONTs



#### 15 Minute Break



Please respect others and return on time.



# **Knowledge Check**

What is a VLAN?

Difference between Layers 1, 2 and 3

 Have you provisioned a Cisco/Brocade/Juniper switch?



#### **VLAN** Creation

Bridge Logical on Device core-olt (192.168.50.22 : MXK-3U)

Select Physical

Select Physical Ports

NetHorizhon - Bridge Logical on Device core-olt (192, 168, 50, 22 : MXK-3U)

-Bridge Logical Type

Use Templates

VLAN ID(1..4090):

Outgoing COS option:

Outgoing COS value: Stag Protocol Id: SLAN / Satag Id(1, 4000)

S-tag Outgoing COS opton:

S-tag Outgoing COS Value

VLAN Translate From ID(1,.4090)

SLAN Translate From ID(1..4090):

Use Existing Packet Rules Use Packet Rule Template
 Ingress Packet Rule Group Index:: 0

Egress Packet Rule Group Index:: 0

MVR Vlan ID:

MSTP Instance:

Single Tagged (TG

CinO


Disable All

Disable Al

□ STP

□ OoS

 POL uses VLANs just like Ethernet switches

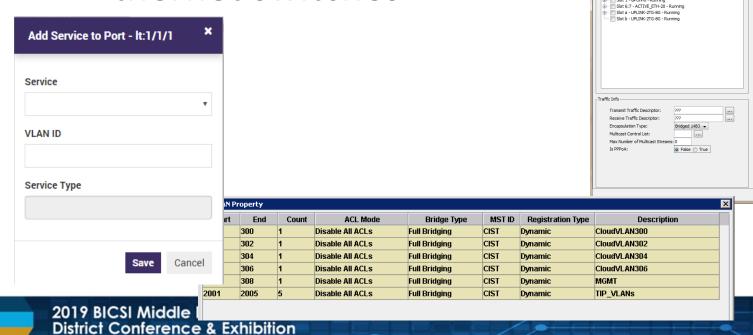






Close

# **Uplink Provisioning**

 Pick 1G and 10G Ethernet ports to connect to the core network

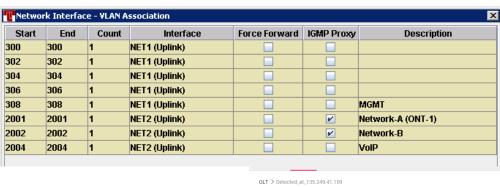

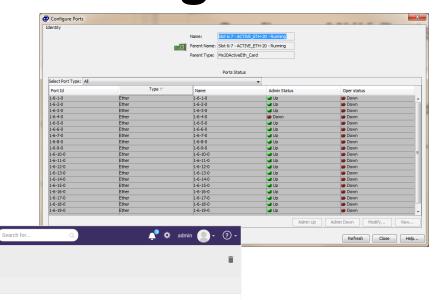

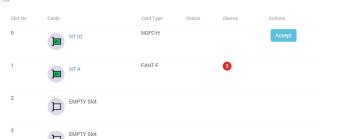





# **Uplink LAGs**

Uplink Interface Property

 Add individual ports to Link Aggregation Groups

Configure LACP

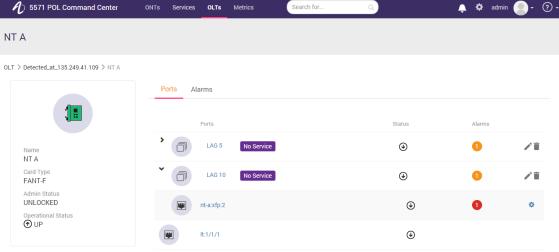


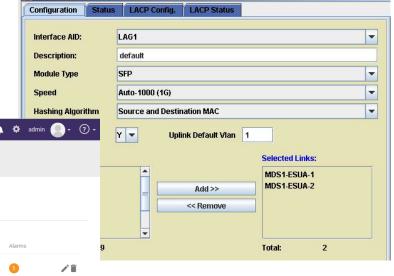


# **ONT Discovery**

- ONTs will notify the OLT when they are connected
- Administrator determines next steps






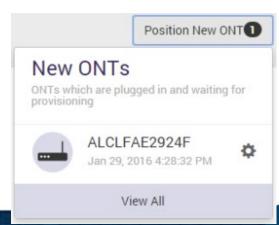




## **ONT Ranging**

- Know your ONT locations before they are deployed
- Assign a name and location as they are ranged

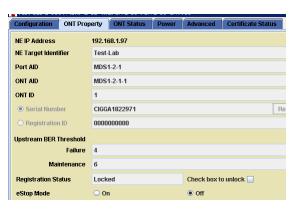










# **ONT Provisioning**

Assign VLANs once ONTs are ranged

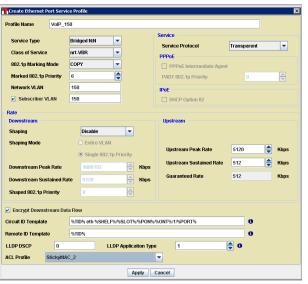

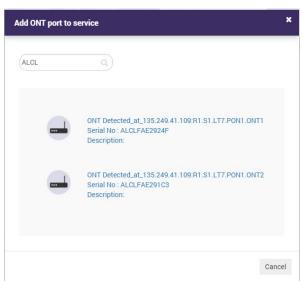

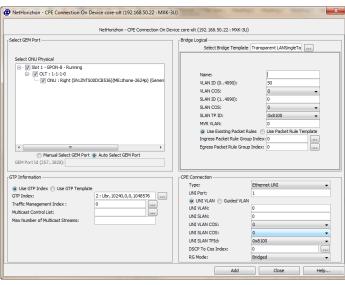



# **Optical Levels**

- OLTs and ONTs will report optical transmit and receive levels
- Provides basic indication of connection problems
- Not intended to replace cable plant certification



## **Type-B Protection**


Provides sub-80ms switchover protection between


PON ports on same OLT

Redundant OLTs an option

Switchover between OLTs

sometimes requires re-ranging

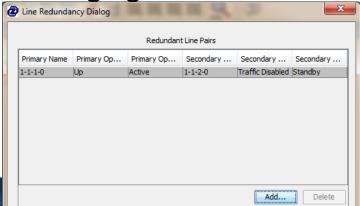

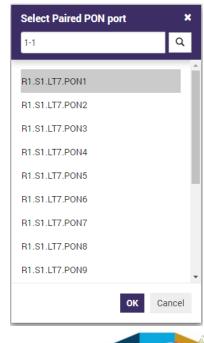

#### **OMCI**

- OLTs communicate with ONTs using ONT Management and Control Interface (OMCI)
- OMCI is part of the GPON standard and operating outside of GEM Ports
- OMCI is established after ONT is ranged



# **Bandwidth Assignment**


 Bandwidth management is built-in to the GPON standard

Required during provisioning

Upstream Ba	ndwidth Profile		
CIR	AIR	EIR	
0	2000	120000	
U	2000	12000	
	Bandwidth Profile	123333	
		,25555	



# **Bandwidth Management**

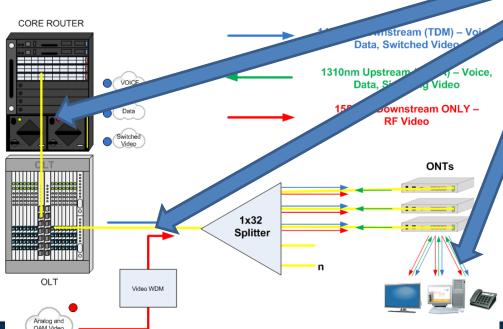

Committed rates cannot exceed capacity of any link in the system




# **Upstream Granting**

- The "Grant" is the permission sent from the OLT to the ONT to:
  - Allow the ONT to transmit traffic in its assigned timeslot on the Upstream data train
  - Control the flow of Upstream traffic from the ONTs to the OLT so collisions of traffic from different ONTs on the PON do not occur



#### **Traffic Flow**

Internal switching separates POL from carrier PON vendors

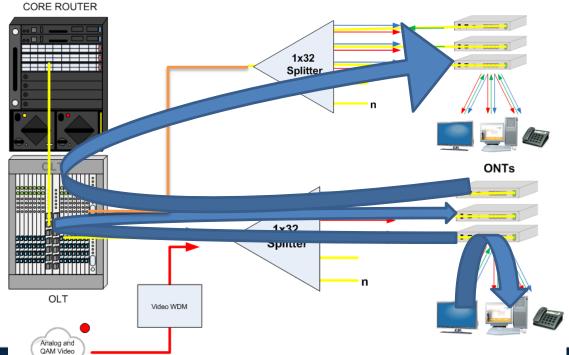

- 1. Within ONT
- 2. Within PON Card
- 3. Within OLT




Conterence & Exhibition

## **GPON Encapsulation**

VLANs mapped to GEM Ports


 GEM Ports assigned to traffic containers

GEM Ports mapped to ONTs

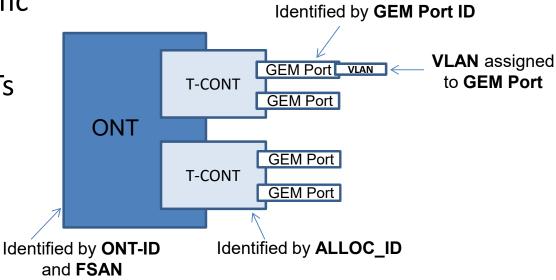

#### Tagging, LLDP, PoE, QoS

- Tag VLANs from ONT
- Deliver power
- Configure connected devices with LLDP
- Customize QoS







#### **STP & Loop Detection**


- Full STP is not required in POL networks
- Loop detection is important





#### Multicast

- Multicast compliments PON topology
- OLTs and ONTs feature IGMP snooping
- Specific multicast VLAN required

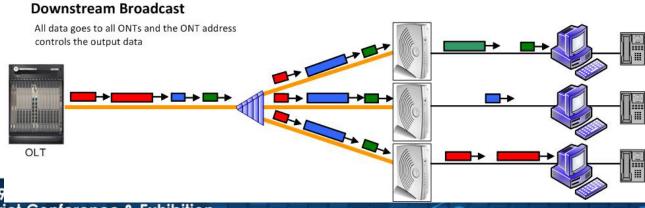





#### **Templates & Profiles**

 Templates and profiles allow admins to create common

Create New Service

settings

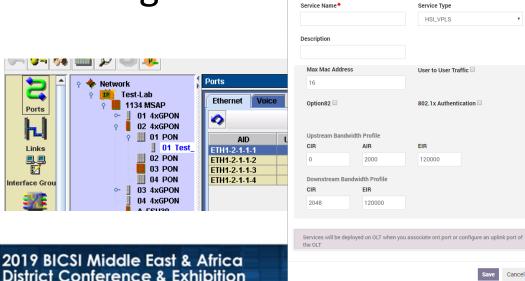


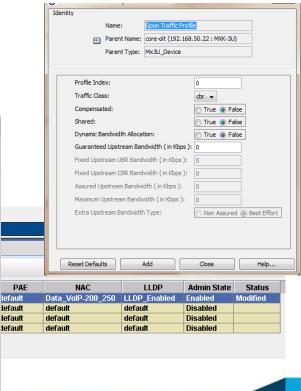



## **Rules & Auto-Port Provisioning**

- Auto-provision ONTs upon detection
- Set rules or selectors based upon ONT properties (location, model, etc.)
- Copy Configurations

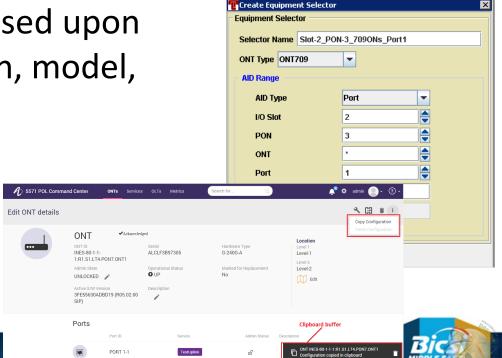

## **Converging Standards**

- IEEE and ITU working to converge standards in future generations
- 10G EPON and XGPON use same PHYs



#### **Future Standards**

- EPON/GPON Networks can co-exist on the same fiber
   & splitters as 10G EPON/XGPON Networks
- 10G EPON and XGPON use same PHYs
- IEEE and ITU working to converge standards in future generations
- Next standards may combine multiple wavelengths in each direction for additional bandwidth



## **Complimentary Wavelengths**

#### **EPON/GPON**

1490nm Down / 1310nm Up

#### 10G EPON/XGPON


1577nm Down / 1270nm Up

#### **RF Video**

1550nm Down




### Migration to 10G

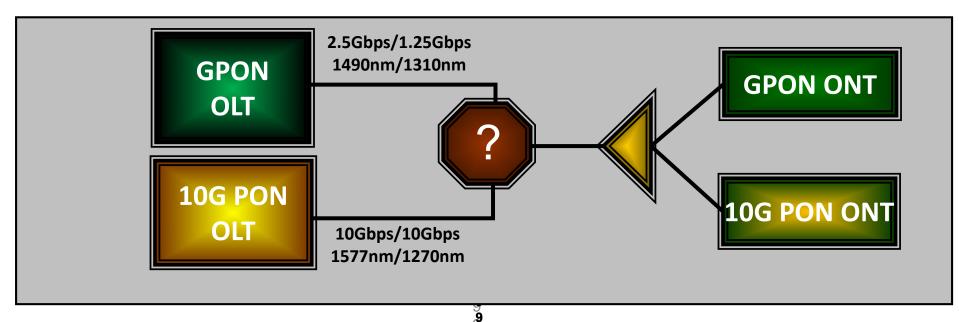

- 10G PON can coexist on the same fiber as GPON
- Bandwidths available as 10G Downstream and 10G/2.5G/1G Upstream
- Uses same infrastructure/splitters as GPON
- Casual migration upgrade only the ONTs that you want



#### The Migration to 10 & 40G PON

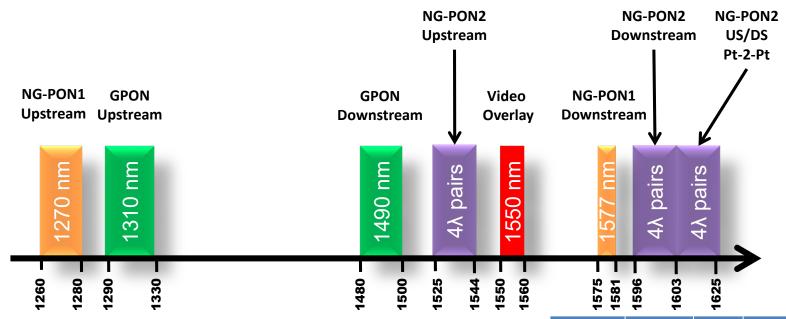

The cabling infrastructure stays the same and only the users that need it are upgraded.

PON Name	Version	DOWN (Gbps)	UP (Gbps)	Industry Standard	
G-PON		2.5	1.25	ITU G.984	
NG BONA	XG-PON	10	2.5	ITU G.987	
NG-PON1	XGS-PON	10	10	ITU G.9807	
NG-PON2		40	40	ITU G.989	

2019 BICSI Middle East & Africa District Conference & Exhibition

#### **Questions?**

Passive Optical LAN
Integration & Management



# POL Project Closeout Package






#### **Suggested Contents**

- Rack Elevation Drawings
- As-Built Drawings
- Interconnect Documentation
- Test Results
- Datasheets and Documentation




# **Rack Elevation Drawings**

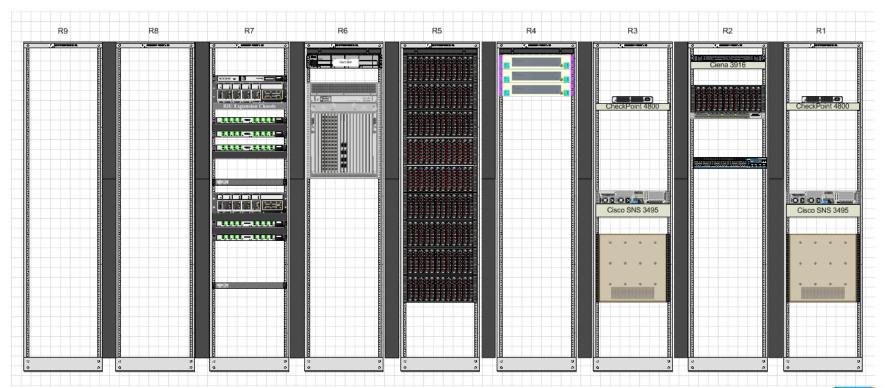



# **As-Built Drawings**

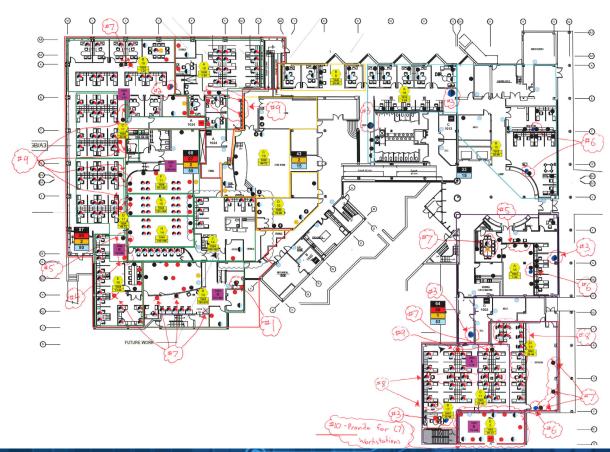



#### **Interconnect Documentation**

Site	Building	OLT Rack	OLT Chassis	PON Card	PON Port	VAM Shelf	VAM Module	VAM Port	Backbone Shelf	Riser Cable	Backbone Port
Las Vegas	Mandalay Bay	MDF Rack 6	ManBay001	4	16	1	8	2	2	2	1
Las Vegas	Mandalay Bay	MDF Rack 6	ManBay001	4	16	1	8	2	2	2	1
Las Vegas	Mandalay Bay	MDF Rack 6	ManBay001	4	16	1	8	2	2	2	1
Las Vegas	Mandalay Bay	MDF Rack 6	ManBay001	4	16	1	8	2	2	2	1
Las Vegas	Mandalay Bay	MDF Rack 6	ManBay001	4	16	1	8	2	2	2	1
Las Vegas	Mandalay Bay	MDF Rack 6	ManBay001	4	16	1	8	2	2	2	1
Las Vegas	Mandalay Bay	MDF Rack 6	ManBay001	4	16	1	8	2	2	2	1
Las Vegas	Mandalay Bay	MDF Rack 6	ManBay001	4	16	1	8	2	2	2	1
Las Vegas	Mandalay Bay	MDF Rack 6	ManBay001	4	16	1	8	2	2	2	1
Las Vegas	Mandalay Bay	MDF Rack 6	ManBay001	4	16	1	8	2	2	2	1
Las Vegas	Mandalay Bay	MDF Rack 6	ManBay001	4	16	1	8	2	2	2	1
Las Vegas	Mandalay Bay	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A



#### Interconnect Documentation

FDH	FDH Location	Splitter	Splitter Fiber	FDH Port	RDT	RDT Port Count	RDT Location	RDT Port	Drop#	Room Number	ONT Model	ONT SN#
MB1	3rd floor mechanical room across from 313	1	1	1	1	1-12	Located in front of 115	1	1	GUEST RM 2	ONT 123	90D7B
MB1	3rd floor mechanical room across from 313	1	2	2	1	1-12	Located in front of 115	2	2	120	ONT 123	90F2F
MB1	3rd floor mechanical room across from 313	1	3	3	1	1-12	Located in front of 115	3	3	119	ONT 123	90D75
MB1	3rd floor mechanical room across from 313	1	4	4	1	1-12	Located in front of 115	4	4	116	ONT 123	910D4
MB1	3rd floor mechanical room across from 313	1	5	5	1	1-12	Located in front of 115	5	5	117	ONT 123	90F49
MB1	3rd floor mechanical room across from 313	1	6	6	1	1-12	Located in front of 115	6	6	114	ONT 123	90FCF
MB1	3rd floor mechanical room across from 313	1	7	7	1	1-12	Located in front of 115	7	7	115	ONT 123	9130E
MB1	3rd floor mechanical room across from 313	1	8	8	1	1-12	Located in front of 115	8	8	113	ONT 123	90D72
MB1	3rd floor mechanical room across from 313	1	9	9	1	1-12	Located in front of 115	9	9	112	ONT 123	910C6
MB1	3rd floor mechanical room across from 313	1	10	10	1	1-12	Located in front of 115	10	10	111	ONT 123	90E09
MB1	3rd floor mechanical room across from 313	1	11	11	1	1-12	Located in front of 115	11	11	118	ONT 123	90F08
MB1	3rd floor mechanical room across from 313	N/A	N/A	12	1	1-12	N/A	12	Spare	N/A	N/A	N/A



#### **Interconnect Documentation**

ONT GE Port 1 Device	ONT GE Port 1 MAC	ONT GE Port 2 Device	ONT GE Port 2 MAC	ONT GE Port 3 Device	ONT GE Port 3 MAC	ONT GE Port 4 Device	ONT GE Port 4 MAC	ONT POTS Port 1	ONT POTS Port 2	RF Port	WAP MACs	Notes
Active	N/A	N/A	N/A	N/A	N/A	N/A	N/A	Active	N/A	N/A	N/A	N/A
Active	N/A	N/A	N/A	N/A	N/A	WAP	F40F1B7E0CF8	Active	N/A	N/A	F40F1B7E0CF8	N/A
Active	N/A	N/A	N/A	N/A	N/A	N/A	N/A	Active	N/A	N/A	N/A	N/A
Active	N/A	N/A	N/A	N/A	N/A	N/A	N/A	Active	N/A	N/A	N/A	N/A
Active	N/A	N/A	N/A	N/A	N/A	N/A	N/A	Active	N/A	N/A	N/A	N/A
Active	N/A	N/A	N/A	N/A	N/A	N/A	N/A	Active	N/A	N/A	N/A	N/A
Active	N/A	N/A	N/A	N/A	N/A	WAP	F40F1B7F2B34	Active	N/A	N/A	F40F1B7F2B34	N/A
Active	N/A	N/A	N/A	N/A	N/A	N/A	N/A	Active	N/A	N/A	N/A	N/A
Active	N/A	N/A	N/A	N/A	N/A	WAP	F40F1B6373D8	Active	N/A	N/A	F40F1B6373D8	N/A
Active	N/A	N/A	N/A	N/A	N/A	N/A	N/A	Active	N/A	N/A	N/A	N/A
Active	N/A	N/A	N/A	N/A	N/A	WAP	88F0316C59B4	Active	N/A	N/A	88F0316C59B4	N/A
N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A



#### **Test Results**

Cable ID:

Fiber ID:

Customer:

Company:

Location B

Operator:

#### FasTesT Report

#### **General Information**

Filename: MandalayBay2.olts

3/30/2015

Test time: 2:28 PM; 2:30 PM; 2:31 PM; 2:32 PM; 2:33 PM; 2:34 PM

Wayne Newton

Job ID: AP 2.0 - Mandalay Bay

Comments:

#### Location A

Test date:

Location:

Unit's model: Unit's s/n:

FOT-932 767843 Location:

tion:

Unit's model:

FIBER001; FIBER002; FIBER003; FIBER004; FIBER00

AP 2.0 - Mandalay Bay

Mandalay Bay

Sin City Cabling

FOT-932


Celine Dion Unit's s/n: 774536

#### Operator: FasTesT

Fiber ID	Wavelength	Loss	Ref.	Loss	Ref.	Average	ORL	ORL	Length
		A->B	A->B	B->A	B->A		A->B	B->A	
	(nm)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(ft)
FIBER001	1310	0.39	N/A	1.30	N/A	0.82	42.59	40.05	N/A
FIBER002	1310	0.59	-1.26	0.63	0.87	0.61	42.30	41.61	2,112.7000
FIBER003	1310	0.52	-1.26	0.51	0.87	0.52	42.88	>42.52	2,111.3000
FIBER004	1310	0.37	-1.26	0.44	0.87	0.40	43.58	>42.37	2,115.6000
FIBER005	1310	0.34	-1.26	0.37	0.87	0.36	42.01	>42.25	2,113.2000
FIBER006	1310	1.74	-1.26	1.74	0.87	1.74	42.41	36.18	2,110.6000
FIBER007	1310	0.68	-1.26	0.81	0.87	0.75	38.39	34.97	2,109.1000
FIBER008	1310	0.54	-1.26	0.63	0.87	0.59	42.72	>42.76	2,105.7000
FIBER009	1310	1.51	-1.26	1.60	0.87	1.55	43.27	42.14	2,103.3000
FIBER010	1310	0.45	-1.26	0.56	0.87	0.51	43.54	>42.62	2,105.2000
FIBER011	1310	0.57	-1.26	0.61	0.87	0.59	43.38	42.61	2,107.7000
FIBER012	1310	1.24	-1.26	1.24	0.87	1.24	43.28	40.66	2,104.9000



#### **Datasheets and Documentation**

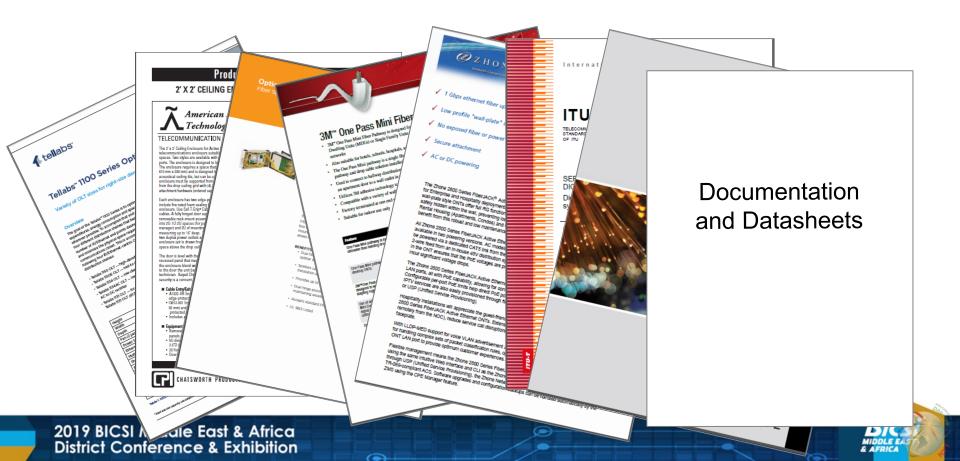

## Questions?

POL Project Closeout Package



# Brought to you by the Association for Passive Optical LAN (APOLAN)

#### **Founding Members:**



www.apolanglobal.org

